



aerospace  
climate control  
**electromechanical**  
filtration  
fluid & gas handling  
hydraulics  
pneumatics  
process control  
sealing & shielding

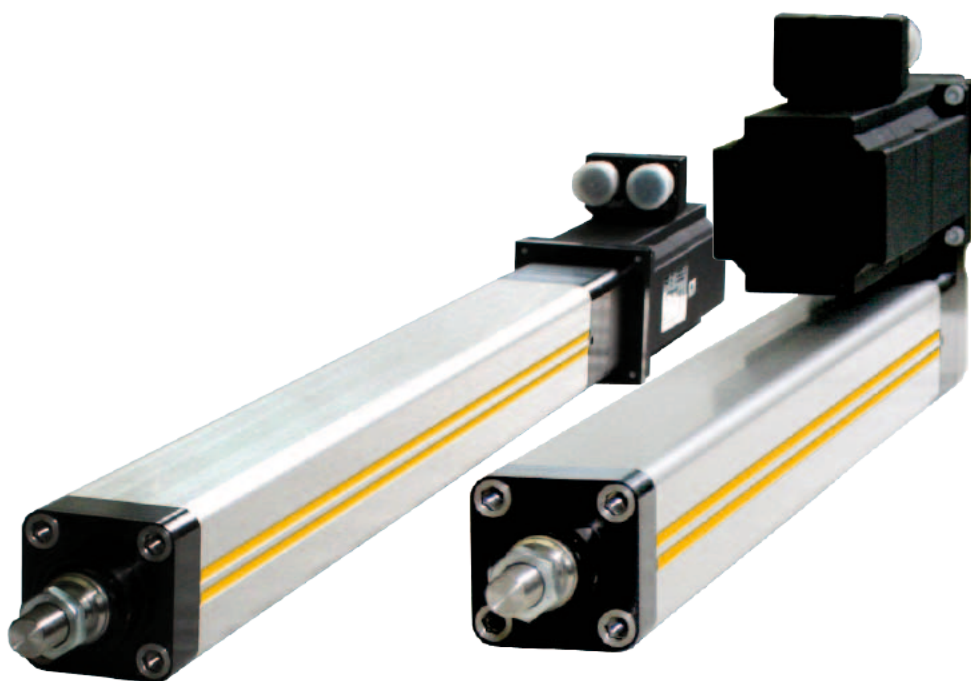

# ETH Electro Cylinder


Parker High Force Electro Thrust Cylinder



ENGINEERING YOUR SUCCESS.

# Electro Cylinder ETH Series

ETH Product Description .....	3
Product Design .....	5
Technical Data .....	6
Step by Step Selection Process .....	7
Calculating Required Axial Force .....	8
Calculation of axial forces: .....	8
Selection of the Size and Screw Lead .....	9
Required maximum axial force .....	9
Required maximum velocity .....	9
Required maximum acceleration .....	9
Service life .....	10
Calculation .....	10
Diagrams .....	11
Permissible Axial Thrust Forces .....	12
Diagrams .....	12
Stroke, Usable Stroke and Safety Travel .....	14
Calculation .....	14
Diagram .....	14
Relubrication .....	15
Dimensions .....	16
Motor Mounting Options .....	17
Motor and Gearbox Selection .....	18
Mounting Methods .....	19
Standard .....	19
Center Trunnion Mounting .....	19
Rear Eye Mounting .....	19
Rear Clevis .....	20
Rear Plate .....	21
Front Plate .....	21
Front and Rear Plate .....	21
Foot Mounting .....	22
Mounting Flanges .....	22
Cylinder Rod Version .....	23
External Thread .....	23
Internal Thread .....	23
Rod Clevis .....	24
Spherical Rod Eye .....	24
Alignment Coupler .....	25
Outrigger Bearing .....	26
Accessories .....	28
Force Sensors .....	28
Initiators / Limit Switches .....	32
Drive Train Selection .....	33
Example for Dimensioning with Predefined Drive Trains .....	33
Predefined Motion Packages for ETH032 .....	34
Predefined Motion Packages for ETH050 .....	36
Predefined Motion Packages for ETH080 .....	38
Order code .....	40

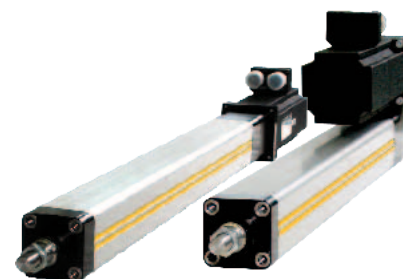

The ETH on the Internet:  
[www.parker-eme.com/eth](http://www.parker-eme.com/eth)

# ETH Product Description

## Advantages of the New Electro Cylinder:

- Unrivalled power density - high forces and small frame sizes
- Initiators / initiator cables can be concealed in the profile
- Optimized for safe handling and simple cleaning
- High service life
- Reduced maintenance costs thanks to lubricating hole in the cylinder flange
- Easy replacement due to pneumatic ISO flange norm (DIN ISO 15552:2005-12) conformity
- Anti-rotation device integrated
- Reduced noise emission
- All from one source  
We offer the complete drive train: Drive controllers, motors and gearboxes matching the Electro Cylinder

## Typical Fields of Application:

The ETH electro cylinder closes the gap between pneumatic and hydraulic drives; it is suitable to replace those in many applications and simultaneously increase the reliability of the production process. Taking the costs for air and oil into consideration, you will find that in most cases an electromechanical system such as the ETH electro cylinder offers the more economical solution. Combined with a wide choice of accessories, it offers many possibilities in the following areas of application:

- Material handling and feed systems:
  - Wood and plastic working industry
  - vertical actuators for loading machine tools
  - in the textile industry for tensioning / gripping textile fabrics
  - in the automotive industry for transporting and feeding components
- Testing equipment and laboratory applications
- Valve and flap actuation
- Pressing
- Packaging machinery
- process automation in the food and beverage industry

## Technical Characteristics:


**For precise motion, positioning, setting and actuating, the electro cylinder offers:**

- High mechanical efficiency up to 90 %
- Strokes up to 1600 mm
- High traction/thrust force up to 25 100 N
- Repeatability up to  $\pm 0.03$  mm
- Speeds up to 1.7 m/s
- Toothed belt drive (for parallel motor mounting)
- Many different screw pitches for thrusts from 5 to 32 mm/rev.
- 3 different sizes (ETH032, ETH050, ETH080)  
additional sizes are planned
- Predefined standardized motor and gearbox flanges for simplified selection. The motors are available directly from Parker (all from one source).
- 3 different protection classes available:
  - IP54 with galvanized screws (standard)
  - IP54 with VA stainless screws
  - IP65

## We also offer customized solutions:


If your application requires a special version of the ETH cylinder, please contact us, we shall be pleased to help you.

- Oil splash lubrication
- Customized mountings and rod ends
- Mounting of customer motors
- Preparation of the cylinder for use under aggressive environmental conditions
- Overlong thrust rod
- Polished thrust rod
- Thrust rod hard-chrome plated
- .....

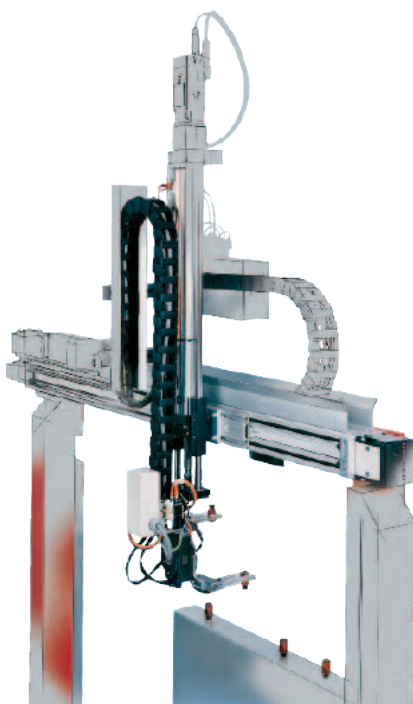


ETH Electro Cylinder  
Parker High Force Electro Thrust Cylinder

# Parker High Force Electro Thrust Cylinder

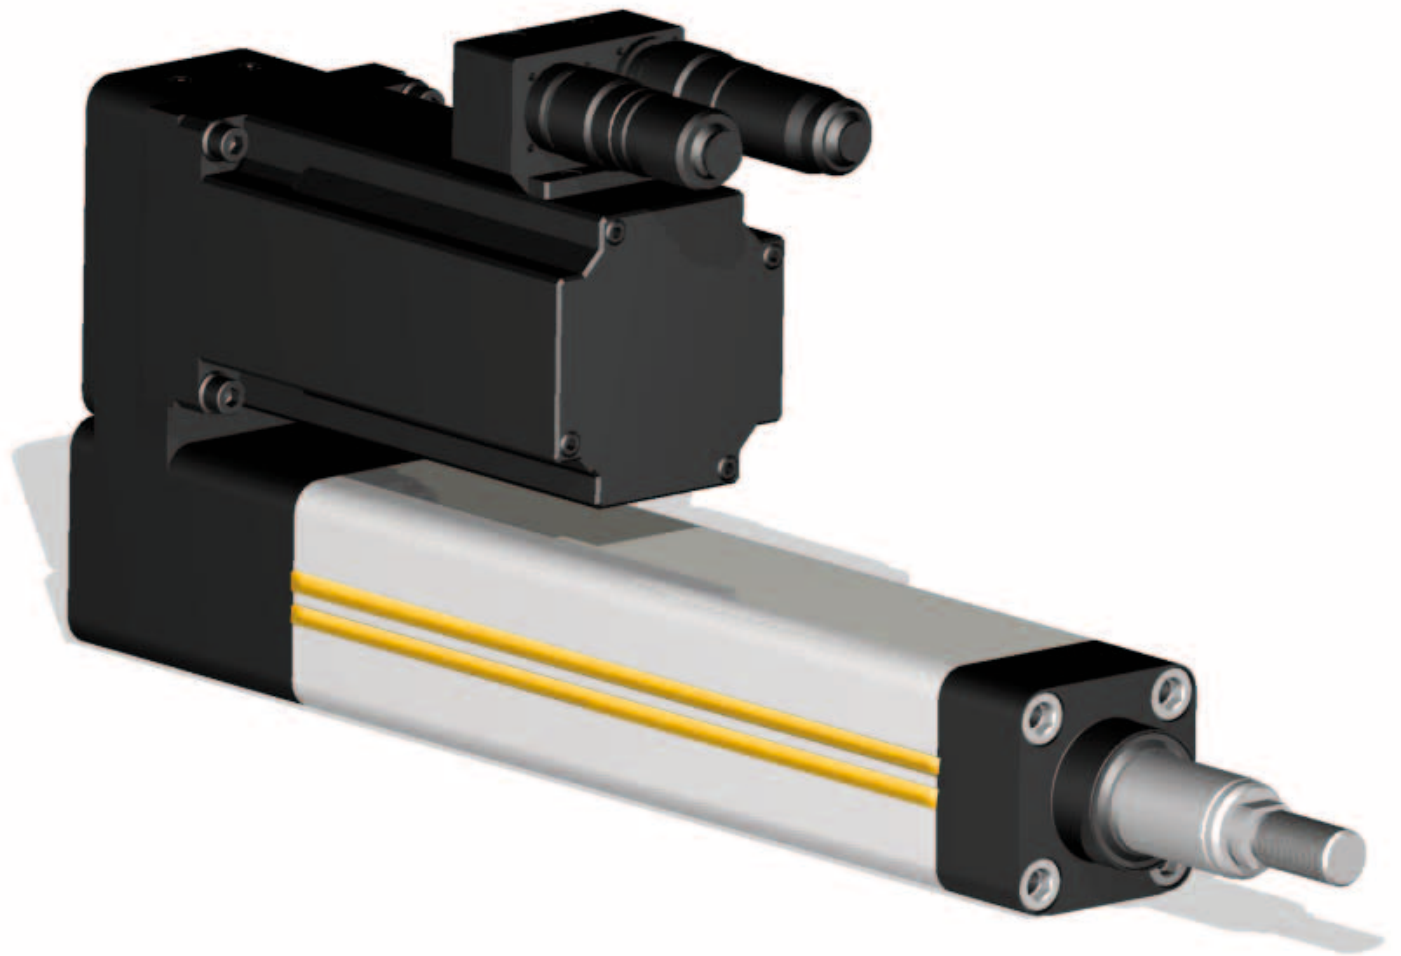


# Product Design

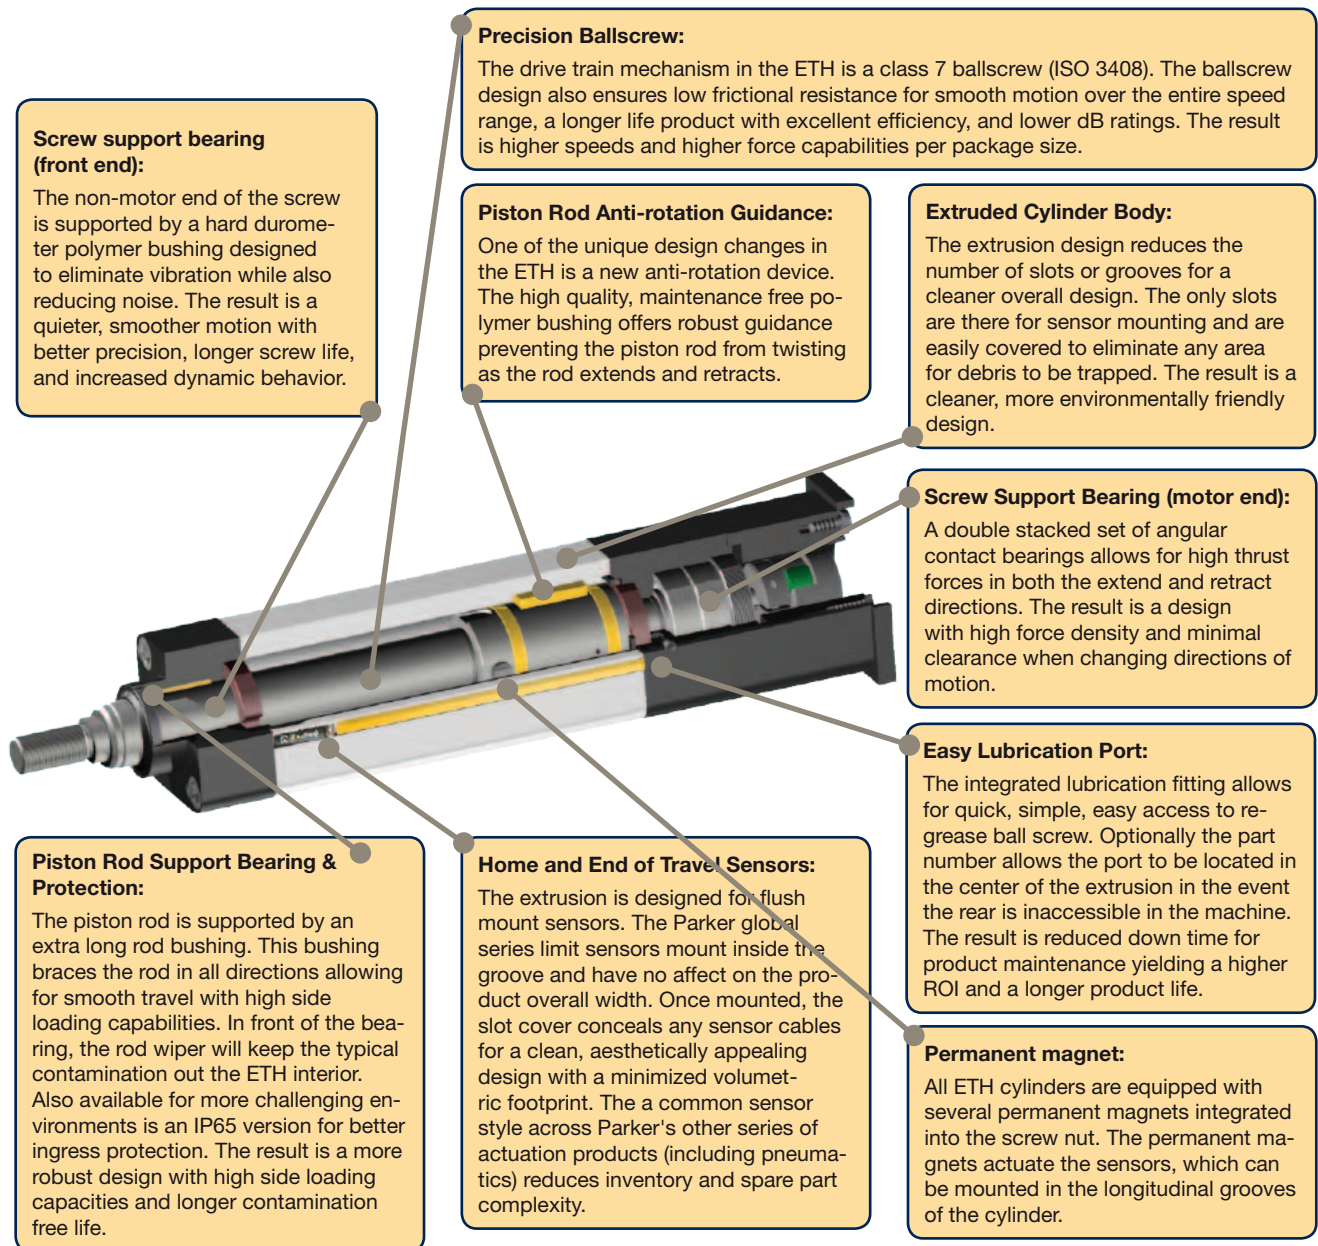

## Parallel Motor Options:

For applications where overall length requirements constrict the allowable space, the parallel motor mount is the answer. With flexibility in motor options, motor location, and motor orientation, the ETH is the most user friendly design allowing quick selection of the best solution for the application needs. The result is a smaller overall package with increased force density versus overall length.

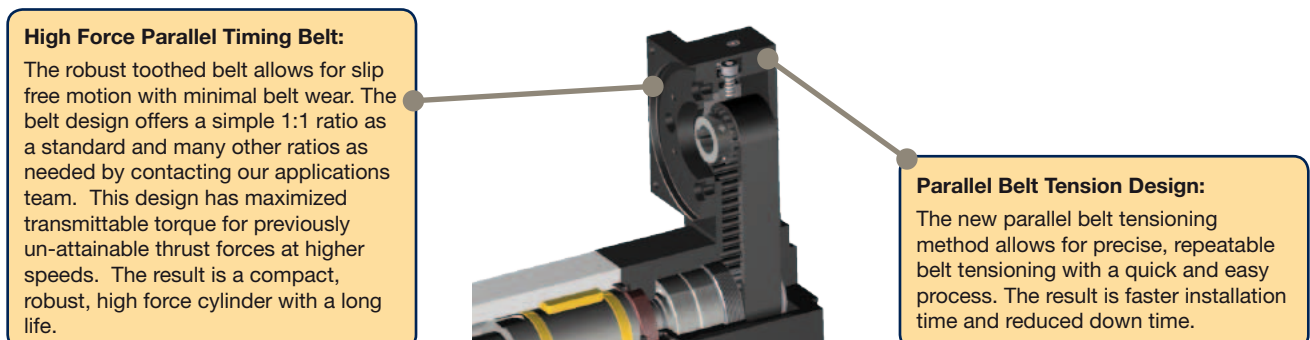



# Technical Data

Cylinder size type	Unit	ETH032			ETH050			ETH080		
		M05	M10	M16	M05	M10	M20	M05	M10	M32
Screw lead	[mm]	5	10	16	5	10	20	5	10	32
Screw diameter	[mm]	16			20			32		

## Travels, speeds and accelerations

Available strokes <sup>1)</sup>	[mm]	continuous from 50-1000 & standard strokes			continuous from 50-1200 & standard strokes			continuous from 50-1600 & standard strokes		
Max. permissible speed at stroke =										
50-400 mm	[mm/s]	333	667	1067	333	667	1333	267	533	1707
600 mm	[mm/s]	286	540	855	333	666	1318	267	533	1707
800 mm	[mm/s]	196	373	592	238	462	917	267	533	1707
1000 mm	[mm/s]	146	277	440	177	345	684	264	501	1561
1200 mm	[mm/s]	-	-	-	139	270	536	207	394	1233
1400 mm	[mm/s]	-	-	-	-	-	-	168	320	1006
1600 mm	[mm/s]	-	-	-	-	-	-	140	267	841
Max. Acceleration	[m/s <sup>2</sup> ]	4	8	12	4	8	15	4	8	15

## Forces

Max. axial traction/thrust force motor inline	[N]		3700	2400		9300	7000	4400		25100	10600
Max. axial traction/thrust force depending on the motor speed n of parallel motor	n < 100 rpm	[N]	3600	3280	2050	9300	4920	2460	17800	11620	3630
	100 < n < 300 rpm	[N]		2620	1640		3930	1960		10720	3350
	n > 300 rpm	[N]		1820	1140		2740	1370			
Equivalent dynamic axial force at a service life of 2500 km	[N]	1130	1700	1610	2910	3250	2740	3140	7500	6050	

## Transmissible torque / thrust force factor

Transmissible torque depending on the motor speed n of parallel motor	n < 100 rpm	[Nm]	6.5			9.7			22.8		
	100 < n < 300 rpm	[Nm]	5.2			7.7			22.8		
	n > 300 rpm	[Nm]	3.6			5.4			21.1		
Thrust force factor motor inline	[N/Nm]	1131	565	353	1131	565	283	1131	565	177	
Force constant motor parallel	[N/Nm]	1018	509	318	1018	509	254	1018	509	159	

## Mass

Mass of basic unit with zero stroke (including cylinder rod)	[kg]	1.2	1.2	1.3	2.2	2.3	2.5	6.9	7.6	8.7	
Weight of additional length (including cylinder rod)	[kg/m]	4.8			8.6			18.7			
Weight of cylinder rod with zero stroke	[kg]	0.06			0.15			0.59			
Weight of cylinder rod - additional length	[kg/m]	0.99			1.85			4.93			

## Mass moments of inertia

Motor parallel without stroke	[kgmm <sup>2</sup> ]	8.3	8.8	14.1	30.3	30.6	38.0	215.2	213.6	301.9	
Motor inline without stroke	[kgmm <sup>2</sup> ]	7.1	7.6	12.9	25.3	25.7	33.1	166.2	164.5	252.9	
Parallel/inline motor per meter	[kgmm <sup>2</sup> /m]	41.3	37.6	41.5	97.7	92.4	106.4	527.7	470.0	585.4	

## Accuracy: Repeatability (ISO230-2)

Motor inline	[mm]	±0.03								
Motor parallel	[mm]	±0.05								

## Efficiency

Motor inline	the efficiency includes all friction torques	[%]	90							
Motor parallel		[%]	81							

## Ambient conditions

Operating temperature	[°C]	-10 ... +70								
Ambient temperature	[°C]	-10 ... +40								
Storage temperature	[°C]	-20 ... +40								
Humidity	[%]	0 ... 95 % (non-condensing)								
Location height range	[m]	max. 3000								

<sup>1</sup> "Order code" (page 40)

Technical Data apply under normal conditions and only for the individual operating and load modes. In the case of compound loads, it is necessary to verify in accordance with normal physical laws and technical standards whether individual ratings should be reduced. In case of doubt please contact Parker.

# Step by Step Selection Process

The following dimensioning steps help you to find the suitable electro cylinder.


Select an electro cylinder using estimated application data. Calculate the actually required application data following the dimensioning steps described below.

If your application's requirements exceed a maximum value, please choose a larger electro cylinder and recheck the maximum values. Perhaps, a smaller electro cylinder can also meet the requirements.

Step	Application data	Dimensioning	With the aid of ...
1	Accuracy, ambient conditions	Check the basic conditions for the use of the ETH in your application.	"Technical Data" (page 6)
2	Required space	Check the space available in your application and choose the motor mounting option: inline or parallel.	"Dimensions" (page 16)
3	Axial forces	Calculation of the axial forces in the individual segments of the application cycle.	"Calculating Required Axial Force" (page 8)
4	Maximum force required	Determination of the maximum required axial force (traction and thrust force)	"Required maximum axial force" (page 9)
		Selection of the cylinder via the maximum axial traction/thrust force (please use the characteristics of your desired motor mounting option: inline or parallel).	"Technical Data" (page 6)
5	Maximum velocity	Selection of the screw lead for the desired cylinder.	"Technical Data" (page 6)
6	Maximum acceleration	Verify maximum acceleration of the unit is not exceeded.	"Technical Data" (page 6)
7	Select stroke	<ul style="list-style-type: none"> <li>Determine required stroke from usable stroke and safety travels</li> <li>select the desired stroke from the list of standard strokes</li> <li>or, if the desired stroke is not listed: Define the length of the usable stroke in steps of one mm. Caution! Please respect the minimum and the maximum possible stroke</li> </ul>	"Stroke, Usable Stroke and Safety Travel" (page 14)  "Order code" (page 40) "Technical Data" (page 6)
8	Permissible thrust force taking the buckling risk into consideration	Check the maximum thrust force depending on the stroke and the mounting variant. Maybe your application can also be realized with a different mounting variant allowing to attain the maximum thrust force.	"Permissible Axial Thrust Forces" (page 12)
9	Service life	Determining the service life with the aid of an equivalent axial force, the operational environment (application factor) and the service life diagrams.	"Service life" (page 10)
10	Permissible lateral force	Determine the lateral forces of your application and compare them to the permissible lateral forces (depending on the stroke).	Lateral force (page 13) Diagrams (page 13)
11	Relubricating cycle	Please check, if the required relubricating cycle is suitable for your production environment.	"Relubrication" (page 15)
12	Motor / gearbox	Calculation of the necessary torque to generate the required force at the ETH. Selection of a suitable motor.	"Motor and Gearbox Selection" (page 18)
13	Motor mounting flange	Selection of a suitable motor mounting flange.	"Motor Mounting Options" (page 17)
14	Mounting type	Selection of the electro cylinder mounting method.	"Mounting Methods" (page 19)
15	Cylinder rods	Selection of the cylinder rod end for load mounting.	"Cylinder Rod Version" (page 23)

# Calculating Required Axial Force

Formula 1 & 2 below give the mathematical equation for calculating the thrust required to extend or retract the piston rod. With the aid of the axial forces, it is possible to check if the electro cylinder is able to provide the required forces and if the maximum buckling load is respected. The axial forces are also used as the calculation basis for the service life.

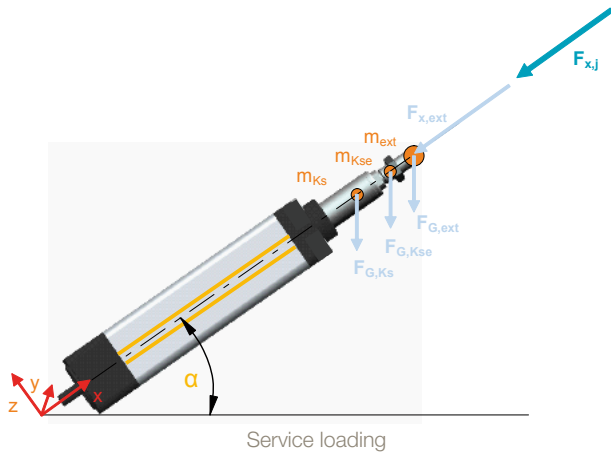

## Formula symbols (Formula 1-2)

$F_{x,a,j}$	= Axial forces during extension in N
$F_{x,e,j}$	= Axial forces during retraction in N
$F_{x,ext}$	= External axial force in N
$F_{G,ext}$	= Weight force caused by an additional mass in N
$F_{G,Kse}$	= Weight force caused by the cylinder rod end in N
$F_{G,Ks}$	= Weight force caused by the cylinder rod in N
$m_{ext}$	= Additional mass in kg
$m_{Kse}$	= Mass of the cylinder rod end in kg (see "cylinder rod versions" page 23)
$m_{Ks,0}$	= Mass of the cylinder rod at zero stroke in kg (see table "Technical Data" page 6)
$m_{Ks,stroke}$	= Mass of the cylinder rod per mm of stroke in kg (see table "Technical Data" page 6)
Stroke	= Selected stroke in m
$a_{k,j}$	= Acceleration at the cylinder rod in $m/s^2$
$\alpha$	= Alignment angle in °
$F_{x,max}$	= Maximum permissible axial force in N

Index "j" for the individual segments of the application cycle

## Calculation of axial forces:

Determine the axial forces occurring during each individual segment of the application cycle.

### Cylinder rod extending:

$$F_{x,a,j} = \left| F_{x,ext} + (m_{ext} + m_{Kse} + m_{Ks,0} + m_{Ks,Stroke} \cdot \text{Stroke}) \cdot (a_{k,j} + \sin \alpha \cdot 9,81 \frac{m}{s^2}) \right|$$

Formula 1

### Cylinder rod retracting:

$$F_{x,e,j} = \left| -F_{x,ext} + (m_{ext} + m_{Kse} + m_{Ks,0} + m_{Ks,Stroke} \cdot \text{Stroke}) \cdot (a_{k,j} + \sin \alpha \cdot 9,81 \frac{m}{s^2}) \right|$$



Formula 2

The values  $F_{x,a,j}$  and  $F_{x,e,j}$  are therefore always positive.

### Sample calculation:

#### Vertical mounting

- ETH50
- Stroke = 500 mm = 0.5 m
- Pitch = 5 mm
- Rod End: External thread
- Trapezoidal velocity course
- Acceleration  $a_k = 4 \text{ m/s}^2$
- $m_{ext} = 150 \text{ kg}$
- $F_{x,ext} = 1000 \text{ N}$
- $m_{Kse} = 0.15 \text{ kg}$
- $m_{Ks,0} = 0.15 \text{ kg}$
- $m_{Ks,Stroke} = 1.85 \text{ kg/m}$
- Alignment angle  $\alpha = -90^\circ$

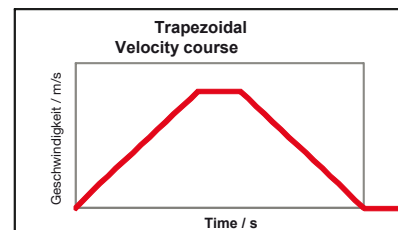

#### Thrust rod moving forth: Mass is moved downwards

Load case: Acceleration

$$F_{x,1} = \left| 1000 \text{ N} + \left( 150 \text{ kg} + 0.15 \text{ kg} + 0.15 \text{ kg} + 1.85 \frac{\text{kg}}{\text{m}} \cdot 0.5 \text{ m} \right) \cdot \left( 4 \frac{\text{m}}{\text{s}^2} + \sin(-90^\circ) \cdot 9.81 \frac{\text{m}}{\text{s}^2} \right) \right| = 121 \text{ N}$$

Load case: Constant Velocity

$$F_{x,2} = \left| 1000 \text{ N} + \left( 150 \text{ kg} + 0.15 \text{ kg} + 0.15 \text{ kg} + 1.85 \frac{\text{kg}}{\text{m}} \cdot 0.5 \text{ m} \right) \cdot \left( 0 \frac{\text{m}}{\text{s}^2} + \sin(-90^\circ) \cdot 9.81 \frac{\text{m}}{\text{s}^2} \right) \right| = 484 \text{ N}$$

Load case: Deceleration

$$F_{x,3} = \left| 1000 \text{ N} + \left( 150 \text{ kg} + 0.15 \text{ kg} + 0.15 \text{ kg} + 1.85 \frac{\text{kg}}{\text{m}} \cdot 0.5 \text{ m} \right) \cdot \left( -4 \frac{\text{m}}{\text{s}^2} + \sin(-90^\circ) \cdot 9.81 \frac{\text{m}}{\text{s}^2} \right) \right| = 1088 \text{ N}$$

#### Thrust rod moving back: Mass is moved upwards

Load case: Acceleration

$$F_{x,4} = \left| -1000 \text{ N} + \left( 150 \text{ kg} + 0.15 \text{ kg} + 0.15 \text{ kg} + 1.85 \frac{\text{kg}}{\text{m}} \cdot 0.5 \text{ m} \right) \cdot \left( 4 \frac{\text{m}}{\text{s}^2} - \sin(-90^\circ) \cdot 9.81 \frac{\text{m}}{\text{s}^2} \right) \right| = 1088 \text{ N}$$

Load case: Constant Velocity

$$F_{x,5} = \left| -1000 \text{ N} + \left( 150 \text{ kg} + 0.15 \text{ kg} + 0.15 \text{ kg} + 1.85 \frac{\text{kg}}{\text{m}} \cdot 0.5 \text{ m} \right) \cdot \left( 0 \frac{\text{m}}{\text{s}^2} - \sin(-90^\circ) \cdot 9.81 \frac{\text{m}}{\text{s}^2} \right) \right| = 484 \text{ N}$$

Load case: Deceleration

$$F_{x,6} = \left| -1000 \text{ N} + \left( 150 \text{ kg} + 0.15 \text{ kg} + 0.15 \text{ kg} + 1.85 \frac{\text{kg}}{\text{m}} \cdot 0.5 \text{ m} \right) \cdot \left( -4 \frac{\text{m}}{\text{s}^2} - \sin(-90^\circ) \cdot 9.81 \frac{\text{m}}{\text{s}^2} \right) \right| = 121 \text{ N}$$



# Selection of the Size and Screw Lead

## Required maximum axial force

Determine the maximum axial force (page 8) that the electro cylinder must provide.

### **Preselection of the electro cylinder**

Using the calculated force required from page 6, compare the actual ETH specifications to determine which profile size will produce enough force. Once you have determined a profile size, determine that the unit will physically fit in the space allowed by the application (including parallel or in-line motor mounts).

## Required maximum velocity

The maximum velocity of the electro cylinder depends on the stroke. With the profile size selected, refer to the critical speed information (page 6) to determine which screw lead works best for the application at the needed stroke length.

When the precise stroke is defined, the velocity must again be verified.

## Required maximum acceleration

The maximum acceleration depends on the screw lead and serves as an additional selection criterion for the suitable electro cylinder. It is listed in the "Technical Data" (page 6).

# Service life

## Nominal service life<sup>1</sup>

The nominal service life of the electro cylinder can be determined with the aid of the known forces.

The forces calculated for each individual segment of the application cycle must be summarized into an equivalent axial force  $F_m$  ("Calculating Required Axial Force" (page 8)).

## Calculation

$$F_m = \sqrt[3]{\frac{1}{s_{total}} (F_{x,1}^3 \cdot s_1 + F_{x,2}^3 \cdot s_2 + F_{x,3}^3 \cdot s_3 + \dots)} \quad \text{Formula 3}$$

If you need the service life as the number of possible cycles, just divide the service life in kilometers by twice the stroke traveled. i.e. Standstill times are not taken into consideration when determining the equivalent axial force ( $F_m$ ), as  $s_i=0$ . Caution, do always consider the stroke as well as the return stroke.

## Actual service life

The actual service life can only be approximated due to a variety of different effects. The nominal service life  $L$  calculation does, for instance, not take insufficient lubrication, impacts and vibrations into consideration. These effects can however be estimated with the aid of the application factor  $f_w$ .

The actual service life is calculated as follows:

$$L_{fw} = \frac{L}{f_w^3} \quad \text{Formula 4}$$

## Application factor $f_w$

Movement cycle	Shocks/vibrations			
	none	light	medium	heavy
More than 2.5 screw rotations	1.0	1.2	1.4	1.7
1.0 to 2.5 screw rotations* (short stroke applications)	1.8	2.1	2.5	3.0

\* After max. 10 000 movement cycles, a lubrication run must be performed (see lubrication run intervals table).

## Boundary conditions for application factor $f_w$ :

- Externally guided electro cylinders
- Accelerations  $<10 \text{ m/s}^2$
- Application factor  $<1.5$

For other conditions, please contact Parker.

## Lubrication run lengths for short stroke applications

Lubrication run lengths	[mm]	ETH032			ETH050			ETH080		
		M05	M10	M16	M05	M10	M20	M05	M10	M32
		>45	>54	>58	>40	>46	>58	>47	>65	>95

## Prerequisites for nominal service life

- Bearing and screw temperature between  $20^\circ\text{C}$  and  $40^\circ\text{C}$ .
- No impairment of the lubrication, for example by external particles.
- Relubrication in accordance with the specifications.
- The given values for thrust force, speed and acceleration must be adhered to at any rate.
- No approaching the mechanical end stops (external or internal), no other abrupt loads, as the given maximum force of the cylinder may never be exceeded.
- The given lateral forces applied to the cylinder rod must always be respected.
- No high exploitation of several power features at a time (for example maximum speed or thrust force).
- No regulating oscillation at standstill.

## Abbreviations used (formula 3-4)

- $F_m$  = Equivalent axial force in N
- $F_{x,j}$  = Resulting axial force in N (see formula 1 & formula 2, page 8)
- $s_j$  = Travel given a defined force  $F_{x,a,j}$  in mm
- $s_{total}$  = Total travel in mm
- $L$  = Nominal service life in km (see "service life" diagrams page 11)
- $L_{fw}$  = Service life respecting the application factor in km
- $f_w$  = Application factor (see table "application factor" page 10)


Index "j" for the individual segments of the application cycle

<sup>1</sup>The nominal service life is the service life reached by 90 % of a sufficient number of similar electro cylinders until the first signs of material fatigue occur.


# Diagrams

The given values apply when adhering to the recommended lubrication intervals (see relubrication)


## ETH032

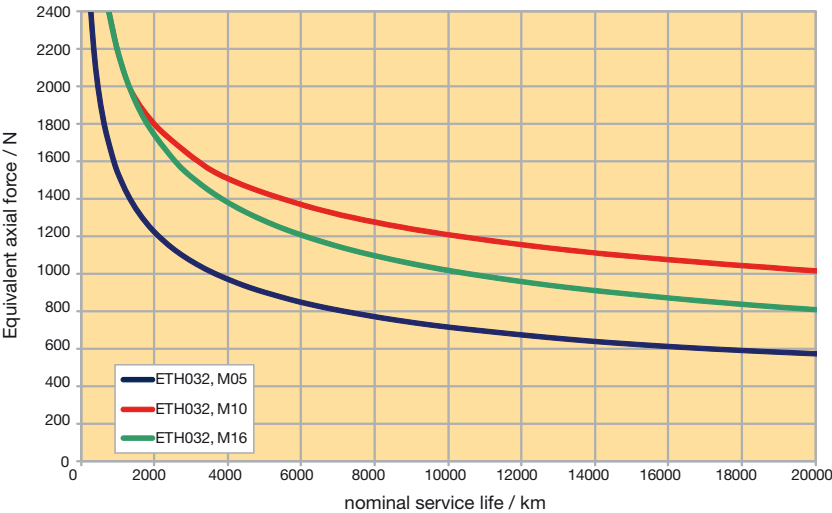

## ETH050

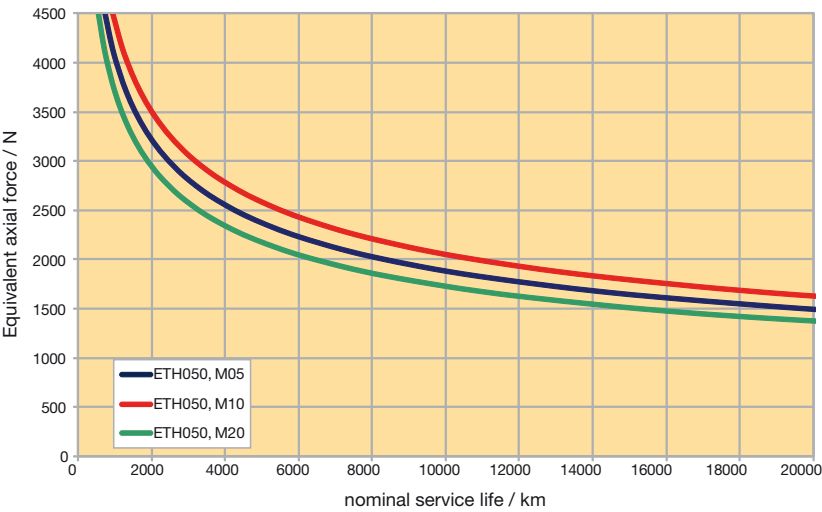

## ETH080

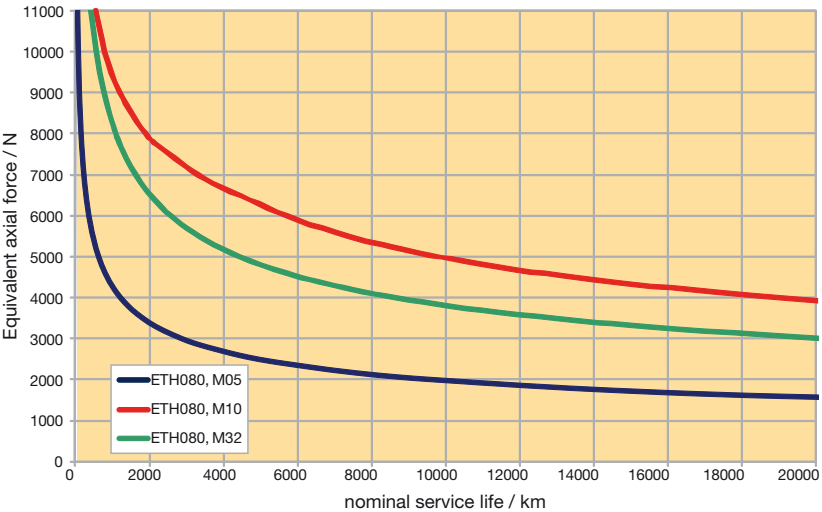


# Permissible Axial Thrust Forces

Limited by buckling risk, depending on the stroke and the mounting method; traction forces do not pose any buckling risk. Please check if the maximum axial force (page 8) is possible with the planned mounting method and for the desired stroke.

## Diagrams


### Case 1

Cylinders fixed with mounting flanges, foot mounting or mounting plates.  
Thrust rod with axial guiding

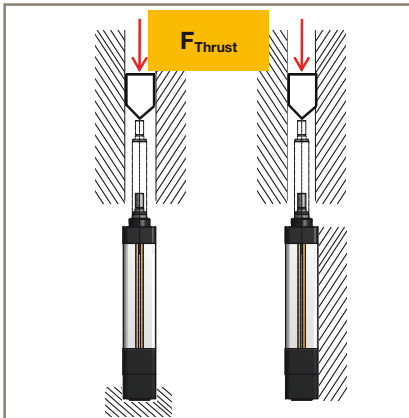


### Case 2

Cylinders fixed with mounting flanges, foot mounting or mounting plates.  
Thrust rod without axial guiding

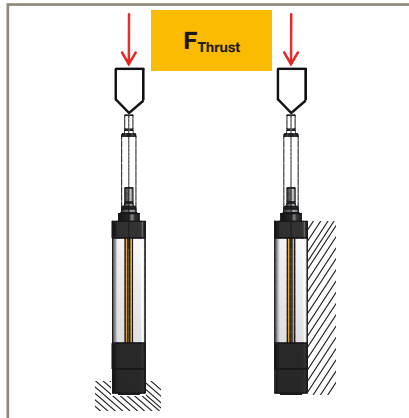


### Case 3


Cylinders mounted via centre trunnion mounting or rear clevis.  
Thrust rod with axial guiding

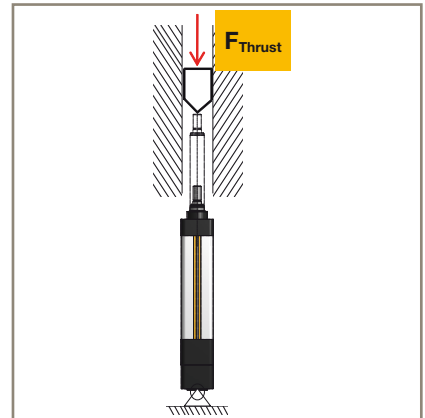


#### ETH032 - Case 1

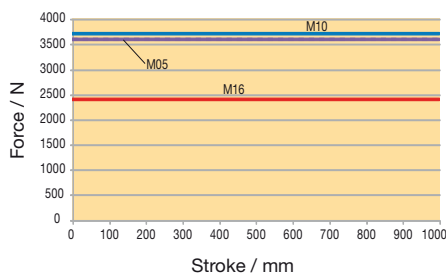


#### ETH032 - Case 2

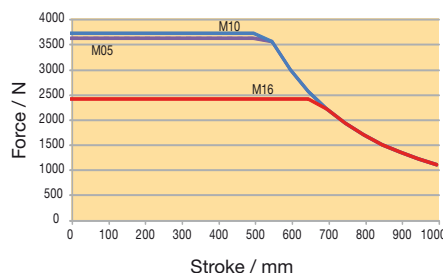


#### ETH032 - Case 3

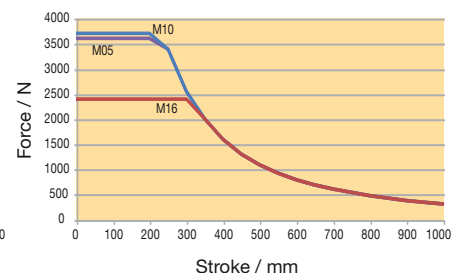


#### ETH050 - Case 1

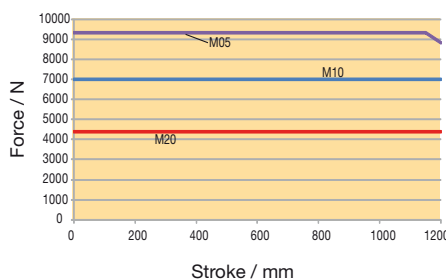


#### ETH050 - Case 2

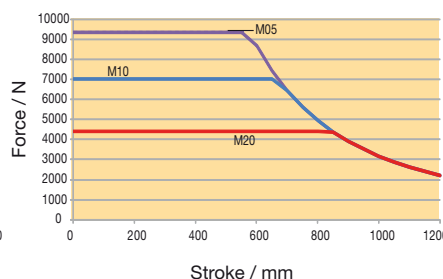


#### ETH050 - Case 3

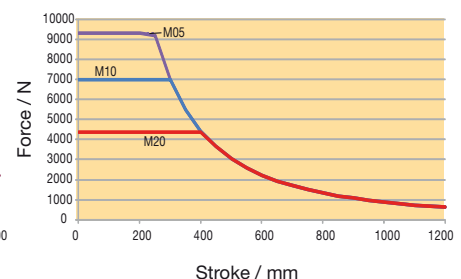


#### ETH080 - Case 1

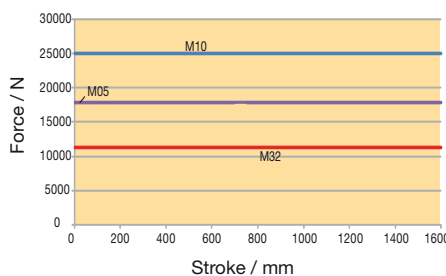

#### ETH080 - Case 2

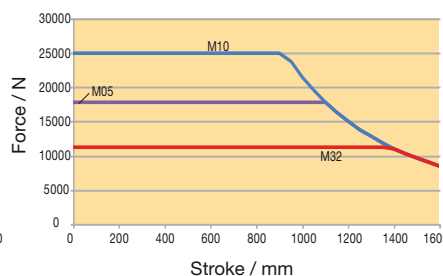

#### ETH080 - Case 3

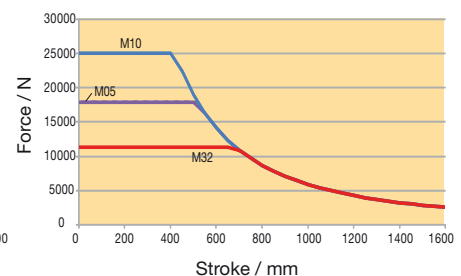


# Permissible Side Load

The electro cylinder features a generously dimensioned cylinder rod and screw nut bearing in the form of high-quality plastic sliding bushings to absorb the lateral force. Please note that electro cylinders with a longer stroke permit a higher lateral force at the same extension length. It may therefore be useful to choose a longer stroke than


required for the application in order to increase the permissible lateral force.

If the permissible lateral forces are exceeded or if the maximum axial force occurs at the same time, the optional outrigger bearing (option R) must be used.

Permissible lateral forces in vertical mounting position




Permissible lateral forces in horizontal mounting position

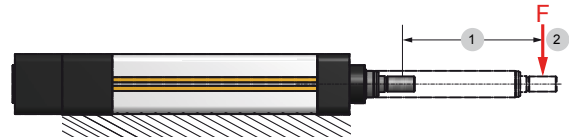


1: extended length

2: Force application - at the middle of the cylinder rod thread


ETH032

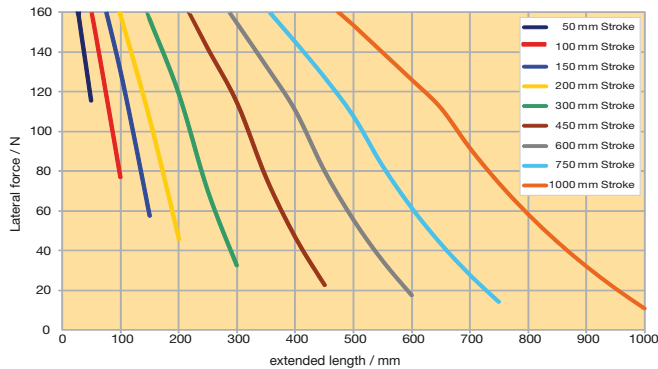


ETH032

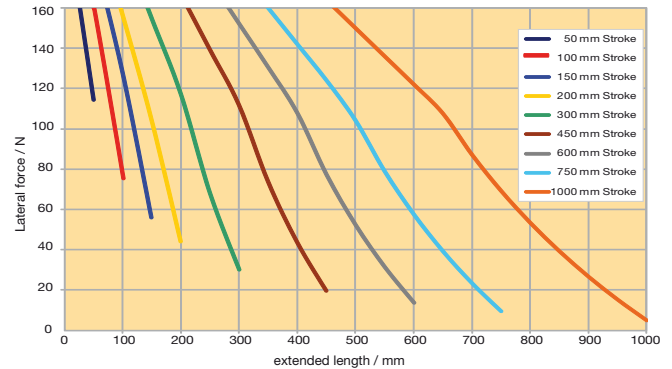


ETH050

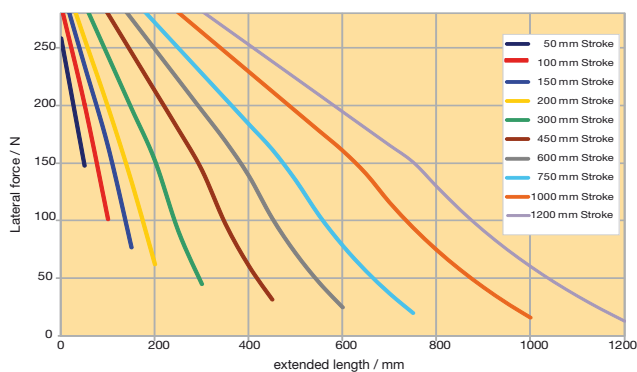


ETH050

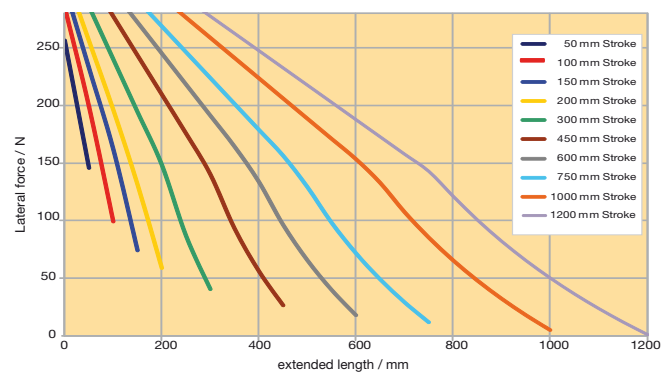

ETH080

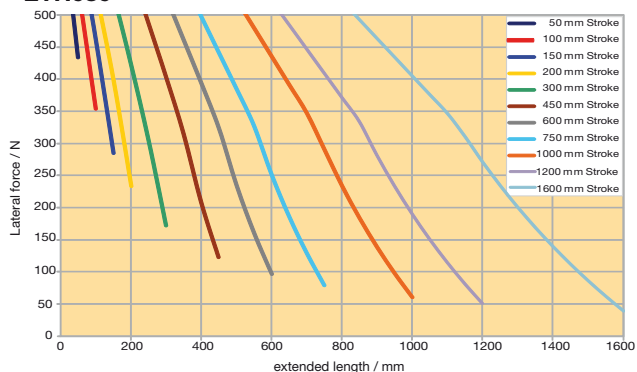

ETH080

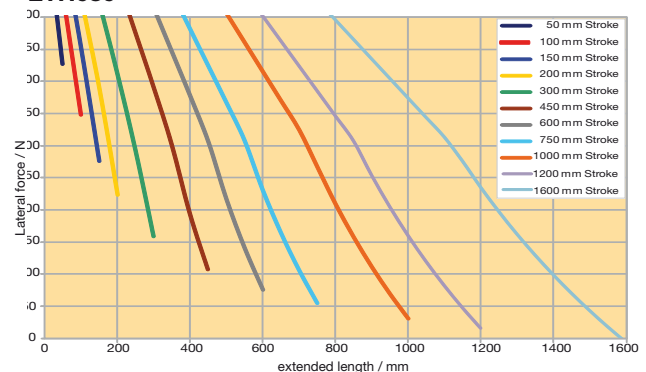

The diagrams apply for a medium travel speed of 0.5 m/s, an ambient temperature of 20 °C and all housing orientations.

# Stroke, Usable Stroke and Safety Travel


## Calculation

### Stroke:

The stroke to be indicated in the order code is the mechanically maximal possible stroke  
Stroke between the internal end stops.

### Usable stroke:

The usable stroke is the distance which you need to move in your application. It is always shorter than the stroke.

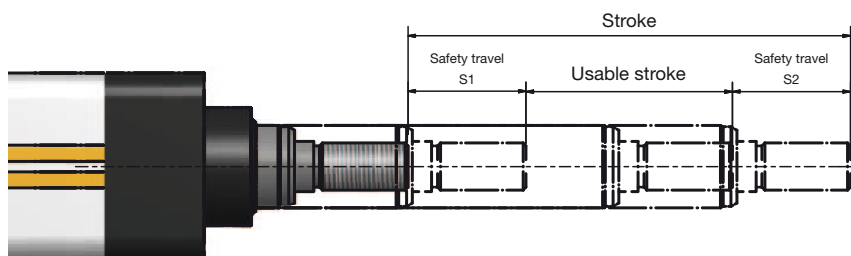


### Safety travel (S1 & S2):

The safety travels are required to slow down the cylinder after it has passed a limit switch, Emergency stop in order to avoid contact with the mechanical limit stops.  
Depending on the screw lead and the

maximum speed, the following diagram recommends a minimum safety travel, which is sufficient for most applications according to experience.  
With demanding applications (great masses and high dynamic), the safety

travel has to be calculated and enlarged accordingly (dimensioning on demand).

## Diagram

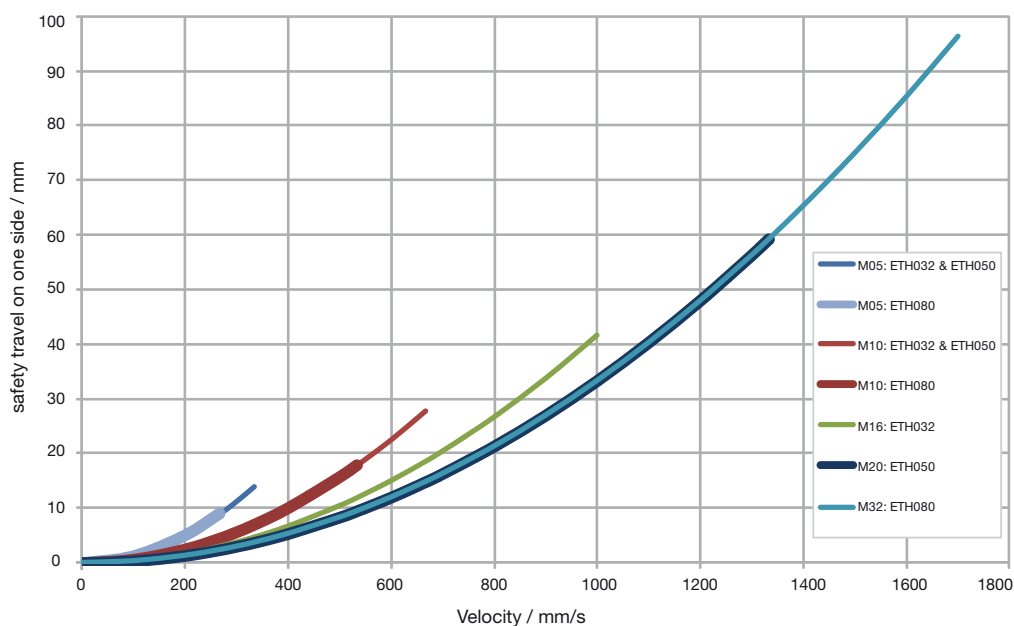

Info:


The safety travel taken from the diagram applies for one side. I.e. the diagram value must be multiplied by factor 2 in order to get the total safety travel.



# Relubrication


All frame sizes include a standard Easy lubrication port (designated by ordering code page 40).option 1), modifications for hole placement can easily be accommodated too.

Contact factory for special needs.

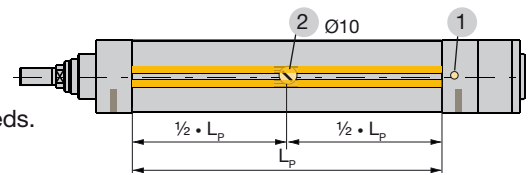


- 1: Central lubrication (standard)  
2: Optional lubrication (possible on all 4 sides);  
 $L_p$ : Length of profile

## Option 1: Central lubrication (standard)

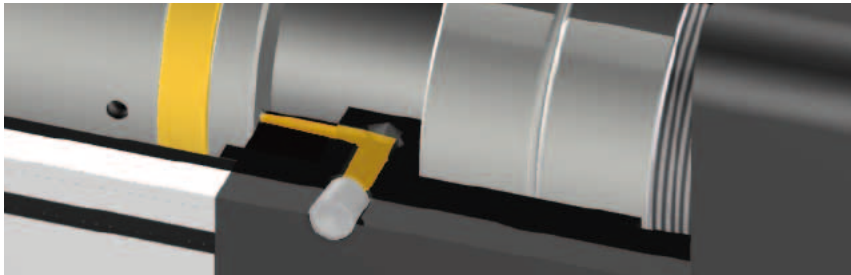

Relubrication is simple with the easy access port. Users simply perform a controlled retract of the cylinder approaching the endstop under slow speed and grease the cylinder. The standard easy access port is always at the 3 o'clock position.

## Option 2...5: Middle lubrication via an opening in the profile

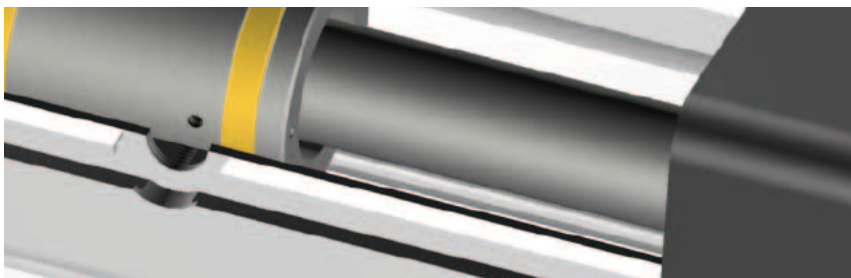

If a space constraint does not allow easy access to the standard lubrication port, other options in the part number configuration allow for a port at the center of the extrusion. Free access to this bore even after integration of the cylinder into a system can be ensured by choosing the corresponding profile orientation (see order code page 40). The bore is located exactly in the middle of the aluminum profile.

## Lubrication intervals

The lubrication intervals depend on the operating conditions (nominal size, pitch, speed, acceleration, loads, etc.) and the ambient conditions (e.g. temperature). Ambient influences such as high loads, impacts and vibrations shorten the lubrication

intervals. In the event of small loads and if the application is impact and vibration free, the lubrication intervals can be increased.

Under normal operating conditions, the given lubrication intervals apply. If the total travel per year is shorter than

the given intervals, the cylinder must be relubricated at least once per year. The lubricant used is supplied by Klüber; it is available worldwide.

### Normal operating conditions:

- Medium screw velocity 2000 min<sup>-1</sup>
- Operating factor  $f_w=1.0$
- No impacts and vibrations


ETH032			ETH050			ETH080		
M05	M10	M16	M05	M10	M20	M05	M10	M32
300 km	600 km	960 km	300 km	600 km	1200 km	300 km	600 km	1500 km

Different operating conditions will shorten the lubrication intervals. In the event of small loads and if the application is impact and vibration free, the lubrication intervals can be increased. Under normal operating conditions, the given lubrication intervals apply. If the total travel per year is shorter than the given intervals, the cylinder must be relubricated at least once per year.

# Dimensions


## Electro Cylinder

prepared for inline motor  
mounting

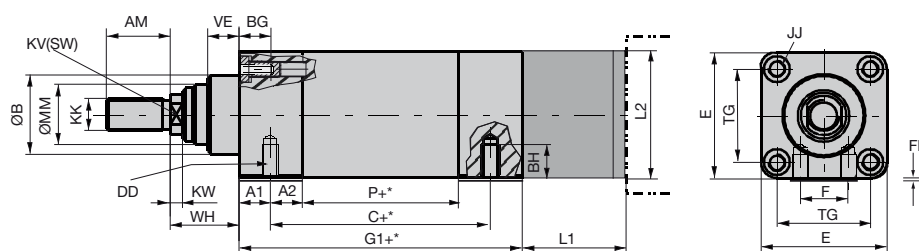

## Electro Cylinder

prepared for parallel motor  
mounting

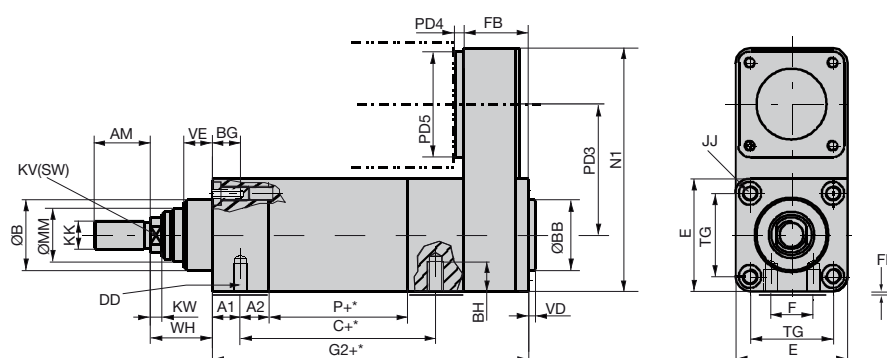

+\* =Measure + length of desired stroke.



## Dimensions Standard / (IP-Version)



Cylinder size	Unit	ETH32			ETH50			ETH80		
Screw lead		M05	M10	M16	M05	M10	M20	M05	M10	M32
C	[mm]	93.5 (94.5)	103 (103.5)	106.5 (107.5)	99.5 (100.5)	105.5 (106.5)	117.5 (118.5)	141.5 (142.5)	159.5 (160.5)	189.5 (190.5)
G1	[mm]	133 (180.5)	142 (189.5)	146 (193.5)	154 (198.5)	160 (204.5)	172 (216.5)	197 (259.5)	215 (277.5)	245 (307.5)
G2	[mm]	180.5 (228.5)	189.5 (237.5)	193.5 (241.5)	194 (239)	200 (245)	212 (257)	257 (320)	275 (338)	305 (368)
P	[mm]	66	75	79	67	73	85	89	107	137
A1	[mm]	14 (60)			15.5 (58.5)			21 (82)		
A2	[mm]	17			18.5			32		
AM	[mm]	22			32			40		
BG	[mm]	16			25			26		
BH	[mm]	9			12.7			17.5		
DDMounting thread	[mm]	M6x1.0 <sup>(1)</sup>			M8x1.25			M10x1.5		
E	[mm]	46.5			63.5			95		
F	[mm]	16			24			30		
FF	[mm]	0.5			0.5			1.0		
JJ	[mm]	M6x1.0			M8x1.25			M10x1.5		
KK	[mm]	M10x1.25			M16x1.5			M20x1.5		
KV	[mm]	10			17			22		
ØMM	[mm]	22			28			45		
TG	[mm]	32.5			46.5			72		
KW	[mm]	5			6.5			10		
N1	[mm]	126			160			233.5		
FB	[mm]	47.5 (48)			40 (40.5)			60 (60.5)		
VD	[mm]	4			4			4		
ØBB	[mm]	30			40			45		
VE	[mm]	12			16			20		
WH	[mm]	26			37			46		
ØB	[mm]	30			40			60		

<sup>(1)</sup> Notwithstanding the current standards,  
you should provide thru holes with a diameter of at least 7 mm in any component you wish to fix with the front screws (with JJ= M6x1 thread).




# Motor Mounting Options

Dimensions [mm]

			Motor dimensions					Motor mounting options			
	inline	Code	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	L1	L2		
<div>ETH032</div> 		K1A	SMH60-B08/9	40	63	9	20	60.0	60.0		
		K1A	MH56-B05/9	40	63	9	20				
		K1B	SMH60-B05/11	60	75	11	23				
		K1B	MH70-B05/11	60	75	11	23	60.0	70.0		
		K1B	NX3	60	75	11	23				
		K1C	SMH82-B08/14	80	100	14	30	67.0	82.0		
		P1A	PS60	50	70	16	40	77.0	63.5		
		P1G	PE3	40	52	14	35	72.0	63.5		
	parallel	Code	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	PD3	PD4		PD5
			K1A	SMH60-B08/9	40	63	9	20	67.5		9.0
		K1A	MH56-B05/9	40	63	9	20				
		K1B	SMH60-B05/11	60	75	11	23	9.0		70.0	
		K1B	MH70-B05/11	60	75	11	23				
		K1B	NX3	60	75	11	23				
		K1C	SMH82-B08/14	80	100	14	30	14.0		82.0	
		P1A	PS60	50	70	16	40	22.0		63.5	
		P1G	PE3	40	52	14	35	16.0		63.5	

			Motor dimensions				Motor mounting options					
	inline	Code	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	L1	L2			
ETH050		K1B	SMH60-B05/11	60	75	11	23	59	70			
		K1B	MH70-B05/11	60	75	11	23	59	70			
		K1B	NX3	60	75	11	23	59	70			
		K1C	SMH82-B08/14	80	100	14	30	63	82			
		K1E	SMH82-B05/19	95	115	19	40	84	100			
		K1E	SMH100-B5/19	95	115	19	40	84	100			
		K1E	MH105-B5/19	95	115	19	40	84	105			
		K1D	MH105-B9/19	80	100	19	40	84	105			
		K1D	SMH82-B08/19	80	100	19	40	84	82			
		K1D	NX4	80	100	19	40	84	82			
		P1A	PS60	50	70	16	40	74	63.5			
		P1G	PE3	40	52	14	35	69	63.5			
		parallel	Code	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	PD3		PD4	PD5
			K1B	SMH60-B05/11	60	75	11	23	87.5		9	70
K1B	MH70-B05/11		60	75	11	23	9	70				
K1B	NX3		60	75	11	23	9	70				
K1C	SMH82-B08/14		80	100	14	30	13	82				
K1F	SMH100-B5/14*		95	115	14	30	13	100				
P1A	PS60		50	70	16	40	24	63.5				
P1G	PE3		40	52	14	35	16	63.5				

\* Order Code SMH100-B5/14: " SMH100...ET..." (the motor shaft diameter is replaced by the term "ET")  
(not in the motors catalog) only with feedback: Resolver, G5, A7

			Motor dimensions				Motor mounting options					
	inline	Code	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	L1	L2			
		K1E	SMH82-B05/19	95	115	19	40	94.5	100			
		K1E	SMH100-B5/19	95	115	19	40	94.5	100			
		K1E	MH105-B5/19	95	115	19	40	94.5	100			
		K1D	MH105-B9/19	80	100	19	40	94.5	96			
		K1D	SMH82-B08/19	80	100	19	40	94.5	96			
		K1D	NX4	80	100	19	40	94.5	96			
		K1K	MH145-B5/24	130	165	24	50	104.5	145			
		K1K	SMH142-B5/24	130	165	24	50	104.5	145			
		K1J	MH105-B6/24	110	130	24	50	104.5	116			
		K1J	SMH115-B7/24	110	130	24	50	104.5	116			
		K1J	NX6	110	130	24	50	104.5	116			
		P1B	PS90	80	100	22	52	106.5	95			
		P1H	PE4	80	100	20	40	94.5	95			
	parallel	Code	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	PD3	PD4		PD5	
			K1E	SMH82-B05/19	95	115	19	40	130		15	100
			K1E	SMH100-B5/19	95	115	19	40			15	100
			K1E	MH105-B5/19	95	115	19	40			15	100
		K1D	MH105-B9/19	80	100	19	40	15		96		
		K1D	SMH82-B08/19	80	100	19	40	15		96		
		K1D	NX4	80	100	19	40	15		96		
		K1K	MH145-B5/24	130	165	24	50	15		145		
		K1K	SMH142-B5/24	130	165	24	50	15		145		
		K1J	MH105-B6/24	110	130	24	50	15		116		
		K1J	SMH115-B7/24	110	130	24	50	15		116		
		K1J	NX6	110	130	24	50	15		116		
		P1B	PS90	80	100	22	52	30		95		
		P1H	PE4	80	100	20	40	12		95		

Additional motor mounting options on request

# Motor and Gearbox Selection

## Drive torque calculation

The torques to be produced by the motor result from the acceleration, the load and the friction torque. The drive torques must be calculated for all segments of the application cycle (represented by index "j").

Calculation of the **acceleration torque** with respect to the rotary moments of inertia:

$$M_{B,j} = \left( (J_{i/p,0} + J_{i/p,Stroke} \cdot Stroke) \cdot \frac{1}{\eta_{ETH}} \cdot \frac{1}{i_G^2 \cdot \eta_G} + J_G + J_M \right) \cdot 10^{-3} \cdot \frac{6,28 \cdot a_{K,j}}{P_h}$$

only with gearbox

Formula 5

The acceleration forces due to the translatory moved masses are taken into consideration in the calculation of the axial forces on page 8.

The **load torques** result from the occurring axial forces:

$$M_{L,j} = \frac{F_{x,a/e,j}}{\text{Thrust force factor}} \cdot \frac{1}{i_G^2 \cdot \eta_G}$$

only with gearbox

Formula 6

The motor must therefore generate the following drive torques:

$$M_{M,j} = M_{B,j} + M_{L,j}$$

Formula 7

The **effective torque** can be deduced from the drive torques for all segments of the application cycle (formula 7):

$$M_{eff} = \sqrt[2]{\frac{1}{t_{total}} \cdot (M_{M1}^2 \cdot t_1 + M_{M2}^2 \cdot t_2 + \dots)}$$

Formula 8

## Motor dimensioning

- The nominal torque of the motor must exceed the calculated effective torque (formula 8).
- The peak torque of the motor must exceed the maximum occurring drive torque (formula 7).

With the aid of the "motor mounting options" chart you can check if the respective motor is mechanically compatible to the corresponding electro cylinder.

### Abbreviations used (formula 5-8)



$M_{B,j}$	= Variable acceleration torque in Nm
$J_{i/p,0}$	= Red. rot. mass moment of inertia at zero stroke for inline/parallel motor configuration in kgmm <sup>2</sup> (see "Technical Data" page 6)
$J_{i/p, stroke}$	= Red. rot. mass moment of inertia per mm of stroke for inline/parallel motor configuration in kgmm <sup>2</sup> (see "Technical Data" page 6)
Stroke	= Selected stroke in mm
$\eta_{ETH}$	= Efficiency of the electro cylinder      0.9 (inline drive configuration) 0.81 (parallel motor)
$i_G$	= Gearbox ratio
$\eta_G$	= Efficiency of the gearbox (see gearbox manufacturer specifications)
$J_M$	= Motor mass moment of inertia in kgmm <sup>2</sup> (see motor manufacturer specifications)
$J_G$	= Gearbox mass moment of inertia in kgmm <sup>2</sup> (see gearbox manufacturer specifications)
$a_{K,j}$	= Acceleration at the cylinder rod in m/s <sup>2</sup>
$P_h$	= Screw pitch in mm
$M_{L,j}$	= Load torque in Nm
$F_{x,a/e,j}$	= Loads in x direction in N (see page 8)
$M_{M,j}$	= Drive torque in Nm
$M_{eff}$	= Effective value - motor in Nm
$t_{total}$	= Total cycle time in s
$t_j$	= Amount of time in the cycle in s

Force constant "Technical Data" see page 6.

Index "j" for the individual segments of the application cycle



# Mounting Methods

## Standard

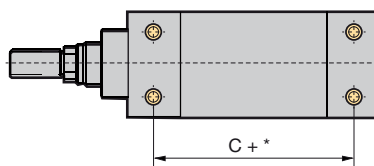

Mounting with 4 mounting threads on the cylinder ("Dimensions" see page 16)

## Center Trunnion Mounting

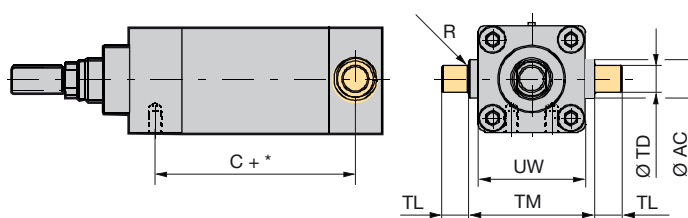



	UW	ØTD**	R	TL	TM	ØAC
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	46.5	12	1	12	50	18
<b>ETH050</b>	63.5	16	1	16	75	25
<b>ETH080</b>	95.3	25	2	25	110	35

+\* =Measure + length of desired stroke ("Dimensions" see page 16).

\*\* : ØTD in accordance with ISO tolerance zone h8

Note: For relubrication option "1" (central lubrication port) please see mounting method with option "D" center trunnion always on 6 o'clock!


## Rear Eye Mounting

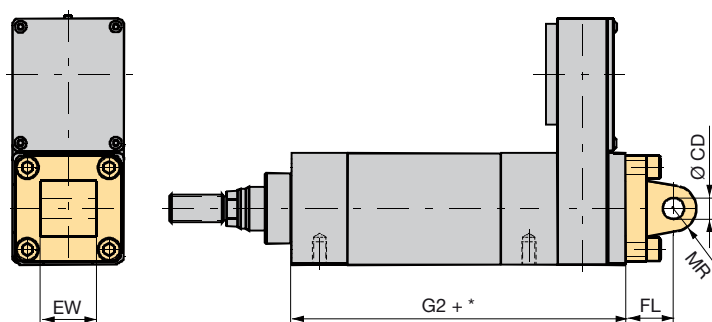




	Order no.	EW	ØCD	MR (H9)	FL ±0.2
		[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	0112.033	26	10	11	22
<b>ETH050</b>	0122.033	32	12	13	27
<b>ETH080</b>	0132.033	50	16	17	36

+\* =Measure + length of desired stroke ("Dimensions" see page 16).

Listed in the order code of the cylinder; the order number applies only for ordering spare parts.



## Rear Clevis

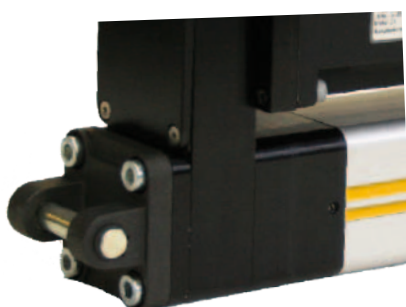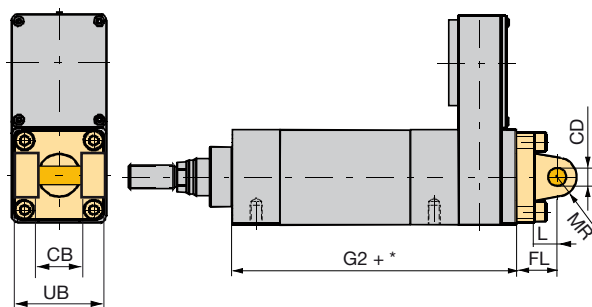



	Order no.	UB (h13)	CB (H14)	ØCD (H9)	MR	L	FL ±0.2
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	0112.031	46.5	26	10	9.5	13	22
<b>ETH050</b>	0122.031	63.5	32	12	12.5	16	27
<b>ETH080</b>	0132.031	95	50	16	17.5	22	36

+\* = Measure + length of desired stroke ("Dimensions" see page 16).  
Listed in the order code of the cylinder; the order number applies only for ordering spare parts.

## Bearing Block



Counter piece of rear clevis  
Please order separately with order no., if required

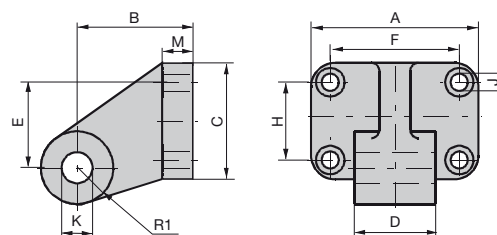

	Order no.	A	B	C	D	E	F	H	ØJ (H13)	ØK (H9)	M	R1
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	0112.032	51	32	31	26	21	38	18	6.6	10	8	11
<b>ETH050</b>	0122.032	67	45	47	32	32	50	30	9.0	12	12	13
<b>ETH080</b>	0132.032	86	63	60	50	47	66	40	11.0	16	16	16.5



## Rear Plate

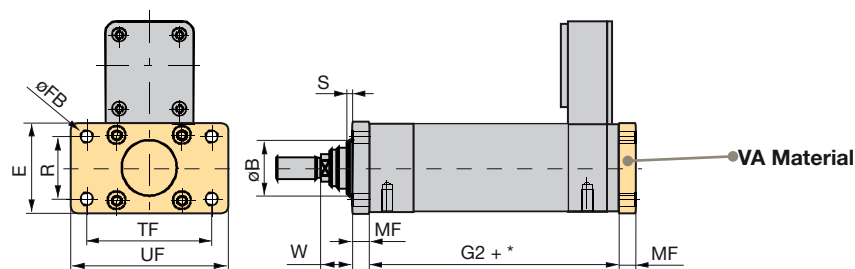



### Front plate dimensions

	Order no. (1 piece)	UF	E	TF	ØFB	R	W	MF	ØB	S
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	0111.064	80	48	64	7	32	16	10	30	2
<b>ETH050</b>	0121.064	110	65	90	9	45	25	12	40	4
<b>ETH080</b>	0131.064-01	150	95	126	12	63	30	16	45	4

+\* =Measure + length of desired stroke ("Dimensions" see page 16).

Listed in the order code of the cylinder; the order number applies only for ordering spare parts.

## Front Plate

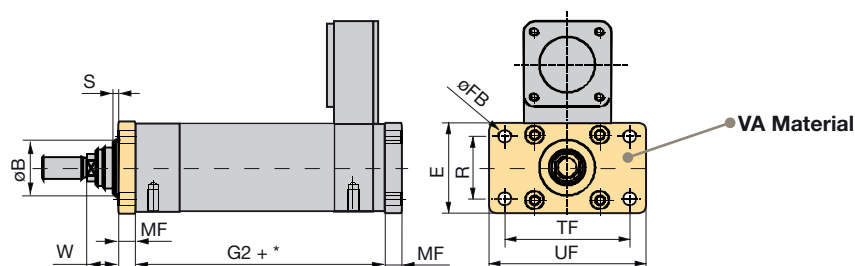




### Front plate dimensions

	Order no. (1 piece)	UF	E	TF	ØFB	R	W	MF	ØB	S
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	0111.064	80	48	64	7	32	16	10	30	2
<b>ETH050</b>	0121.064	110	65	90	9	45	25	12	40	4
<b>ETH080</b>	0131.064-02	150	95	126	12	63	30	16	60	4

+\* =Measure + length of desired stroke ("Dimensions" see page 16).

Listed in the order code of the cylinder; the order number applies only for ordering spare parts.



## Front and Rear Plate

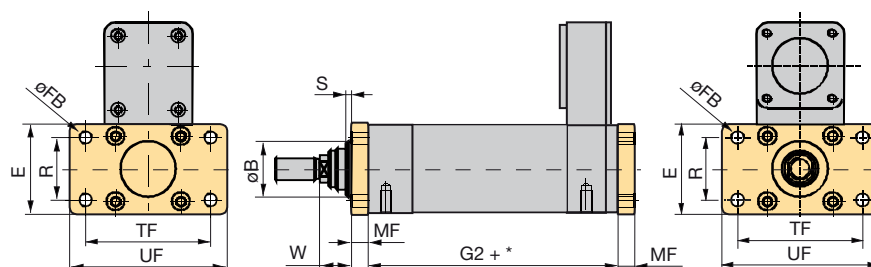

Listed in the cylinder order code.

Please note that front and rear plate as spare parts must be ordered separately.

## Foot Mounting

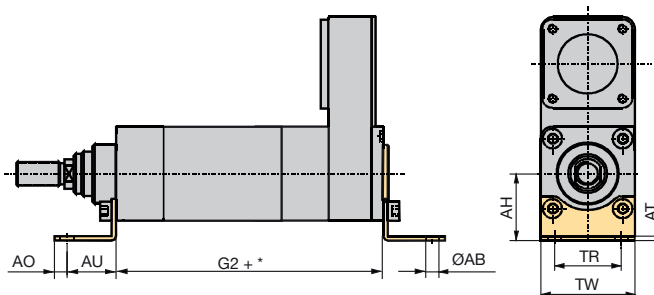


	Order no. (1 piece) Terminal bracket	Order no. (1 piece) Front bracket	AH	AT	TR	ØAB (H14)	AO	AU	TW
			[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	0111.065		32	4	32	7	8	24	48
<b>ETH050</b>	0121.065		45	4	45	9	12	32	65
<b>ETH080</b>	0131.065-01	0131.065-02	63	6	63	11	15	41	95

+\* = Measure + length of desired stroke ("Dimensions" see page 16).

Listed in the order code of the cylinder; the order number applies only for ordering spare parts.

## Mounting Flanges

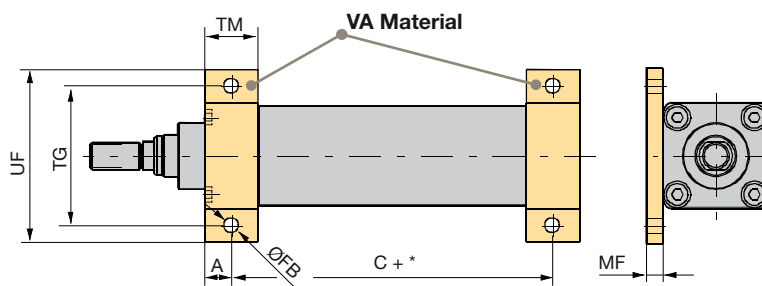



	Order no. (1 piece)	TG	UF	ØFB	TM	MF	A
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	1440.079	62	78	6.6	25	8	14
<b>ETH050</b>	1441.093	84	104	9	30	10	16
<b>ETH080</b>	1442.081	120	144	11	40	12	21

+\* = Measure + length of desired stroke ("Dimensions" see page 16).

Listed in the order code of the cylinder; the order number applies only for ordering spare parts.

# Cylinder Rod Version


## External Thread



External Thread (upon delivery)					
	Order no.	Mass	A	KK	SW*
		[kg]	[mm]	[mm]	[mm]
ETH032	0111.028	0.06	22	M10x1.25	10
ETH050	0121.028	0.15	32	M16x1.5	17
ETH080	0131.028	0.48	40	M20x1.5	22

\*SW: Width across flat




## Internal Thread



Internal Thread						
	Order no.	Mass	A	KK	WH	SW*
		[kg]	[mm]	[mm]	[mm]	[mm]
ETH032	0111.029	0.04	14	M10x1.25	32	12
ETH050	0121.029	0.14	24	M16x1.5	50	20
ETH080	0131.029	0.42	29	M20x1.5	59	26

\* SW: Width across flat (position of the the flat is not fixed)



## Rod Clevis

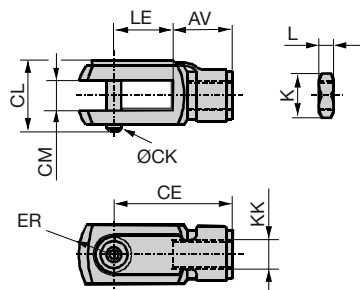

	Order no.	Mass	KK	CL	CM		LE	CE	AV	ER	ØCK (h11/E9)	K	L
		[kg]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
ETH032	4309	0.09	M10x1.25	26.0	10.2	+0.13 -0.05	20	40	20	14	10	17	5
ETH050	4312	0.34	M16x1.5	39.0	16.2	+0.13 -0.05	32	64	32	22	16	24	8
ETH080	4314	0.69	M20x1.5	52.5	20.1	+0.02 -0.0	40	80	40	30	20	30	10

Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Prerequisite is a cylinder rod with external thread.

## Spherical Rod Eye

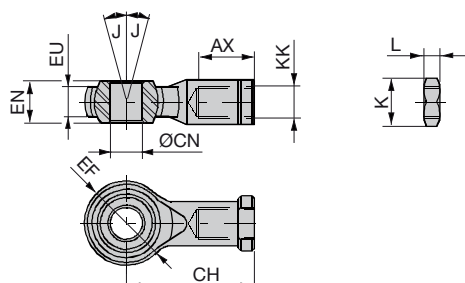

	Order no.	Mass	KK	ØCN (H9)	EN (h12)	EU	AX	CH	ØEF	J°	K	L
		[kg]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	4078-10	0.07	M10x1.25	10	14	10.5	20	43	28	13	17	5
<b>ETH050</b>	4078-16	0.23	M16x1.5	16	21	15.0	28	64	42	15	24	8
<b>ETH080</b>	4078-20	0.41	M20x1.5	20	25	18.0	33	77	50	14	30	10



Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Prerequisite is a cylinder rod with external thread.

## Alignment Coupler



### For mounting at the extremity of the cylinder rod

- Balances misalignments
- Enlarges the mounting tolerance
- Simplifies the cylinder mounting
- Increases the service life of the cylinder guidings
- Compensates the offset between components and relieves the guiding from lateral force influences
- The traction/thrust force bearing capacity remains

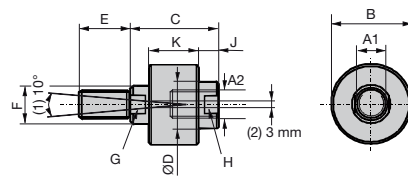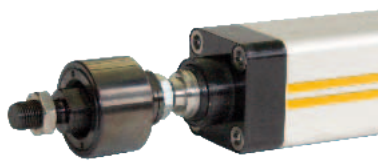

(1): Angle offset  
(2): Axial offset  
A2: Thread depth=E


	Order no.	Mass	A1	A2	B	C	ØD	E	F	G	H	J	K
		[kg]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	LC32-1010	0.26	M10x1.25	M10x1.25	40	51	19	19	16	13	16	13	26
<b>ETH050</b>	LC50-1616	0.64	M16x1.5	M16x1.5	54	59	32	29	25	22	29	14	33
<b>ETH080</b>	LC80-2020	1.30	M20x1.5	M20x1.5	54	59	32	29	25	22	29	14	33

Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Prerequisite is a cylinder rod with external thread.

## Outrigger Bearing

Order code

# R

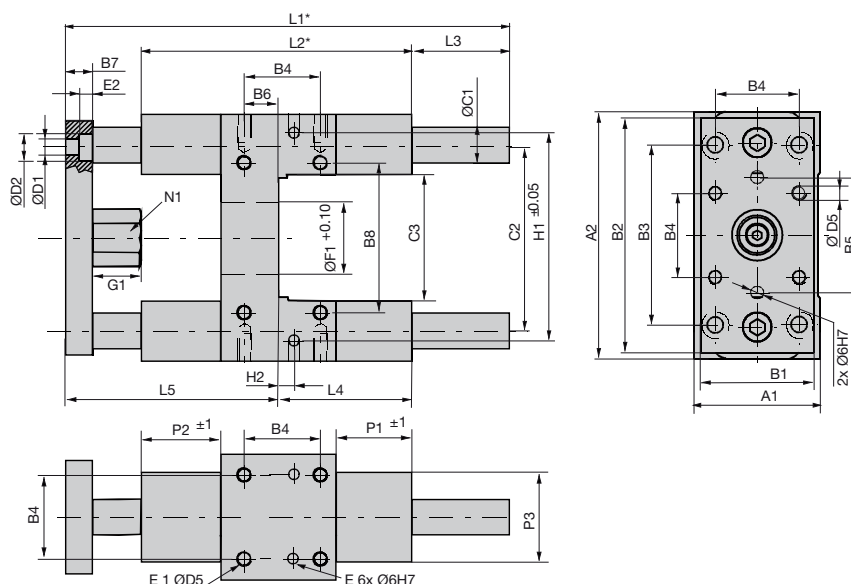

**Function of outrigger bearing:**

- Anti-rotation device for higher torques
- Absorption of lateral forces

**The additional stability and precision is achieved by:**

- 2 hardened steel guiding rods
- 4 linear ball bearings

**Cannot be combined with IP65**

	Unit	ETH032	ETH050	ETH080
Model		32-2800R	50-2800R	80-2800R
A1	[mm]	50	70	105
A2	[mm]	97	137	189
B1	[mm]	45	63	100
B2	[mm]	90	130	180
B3	[mm]	78	100	130
B4	[mm]	32.5	46.5	72
B5	[mm]	50	72	106
B6	[mm]	4	19	21
B7	[mm]	12	15	20
B8	[mm]	61	85	130
ØC1	[mm]	12	20	25
C2	[mm]	73.5	103.5	147
C3	[mm]	50	70	105
ØD1	[mm]	6.6	9	11
ØD2	[mm]	11	14	17
ØD5	[mm]	M6	M8	M10
E (Depth)	[mm]	10	10	10
E1 (Depth)	[mm]	12	16	20
E2 (Depth)	[mm]	7	9	11
ØF1	[mm]	30	40	60
G1	[mm]	17	27	32
H1	[mm]	81	119	166
H2	[mm]	11.7	4.2	15
L1+*	[mm]	150	192	247
L2	[mm]	120	150	200
L3+*	[mm]	15	24	24
L4	[mm]	71	79	113
L5	[mm]	64	89	110
N1	[mm]	17	24	30
P1	[mm]	36	42	50
P2	[mm]	31	44	52
P3	[mm]	40	50	70
Total mass with zero stroke	[kg]	0.97	2.56	6.53
Moving mass zero stroke	[kg]	0.60	1.84	4.36
Additional mass	[kg/m]	1.78	4.93	7.71

+\* =Measure + length of desired stroke  
("Dimensions" see page 16).


N1: Hexagon head,  
outrigger bearing not possible with IP65  
rating!

For the ETH080, the standard pneumatic outrigger bearing modules cannot be used, ØF1 must be bored up to 60 mm for ETH080 (from 45 mm).




## Rigidity of the cylinder with outrigger bearing


**ETH032**

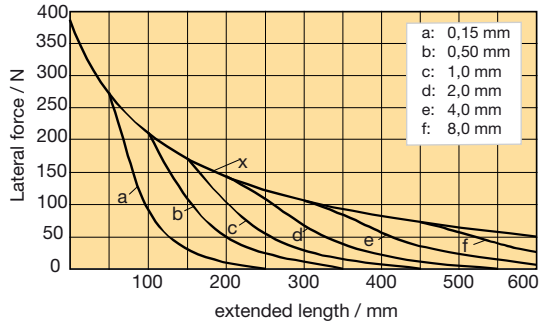

**ETH050**

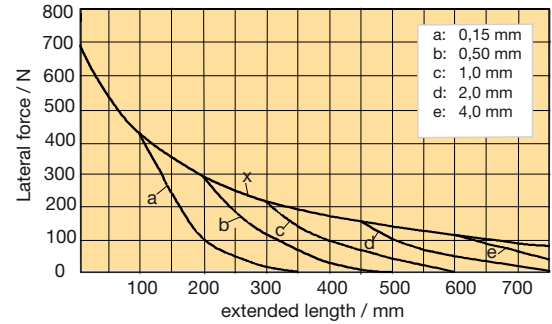


**ETH080**

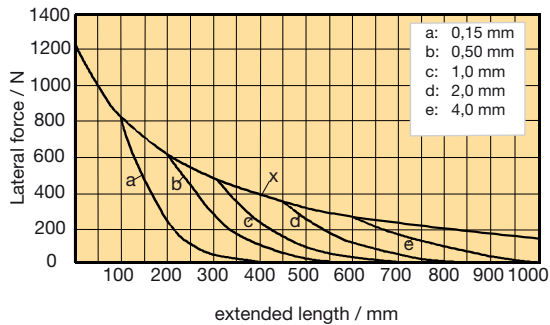


a, b, ...: Deflection  
x: Deflection with maximum load

## Deflection

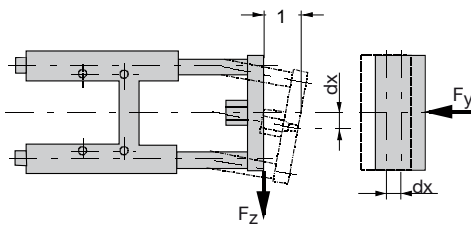

1: Stroke  
dx: Deflection valid for  $F_z$  or  $F_y$   
M: Torsional load

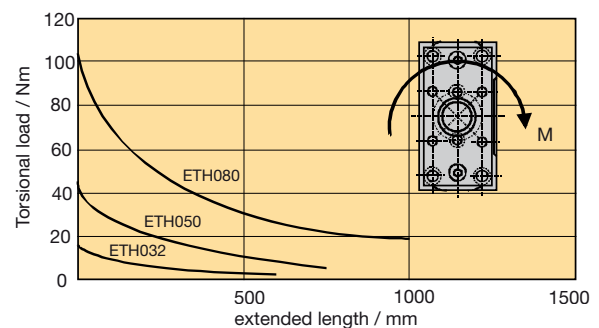

# Accessories


## Force Sensors

### Joint head with integrated force sensor

Swivel heads are important construction components with respect to rotary, pivoting and tilting movements. Force measurements are more and more frequently required in those applications.

The force transducers are suitable for direct mounting on the cylinder rod. They can, for example, be used to measure contact forces or overloads. Thanks to the thin film technology, the swivel head force transducers are very robust and long time stable. An integrated amplifier emits an output signal of 4 ... 20 mA.

The sensors correspond to the EN 61326 standard for electromagnetic compatibility (EMC) and are sized to pick up traction/thrust forces.

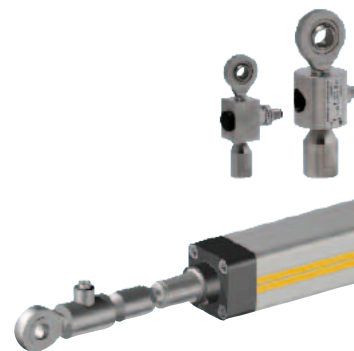

#### Features

- Measuring range:  
Traction/thrust forces up to  $\pm 25$  kN
- Thin film implants (instead of conventional bonded foil strain gauges)
- Corrosion resistant stainless steel version
- Integrated amplifier
- Small temperature drift
- High long term stability
- High shock and vibration resistance
- For dynamic or static measurements
- Good repeatability
- Simple mounting

**Connection of the force sensors to Compax3 is possible on request.**


#### Technical Data

Joint head with integrated force sensor ETH...										
	Unit	ETH032			ETH050			ETH080		
		M05	M10	M16	M05	M10	M20	M05	M10	M32
Accuracy	[%]	0.2								
Material	-	Stainless steel								
Protection class	-	IP67								
Calibration to	[kN]	$\pm 3.7$	$\pm 3.7$	$\pm 2.4$	$\pm 9.3$	$\pm 7.0$	$\pm 4.4$	$\pm 17.8$	$\pm 25.1$	$\pm 10.6$
Accuracy	[N]	14.8	14.8	9.6	37.2	28.0	17.6	71.2	100.4	42.4
Part No.	-	0111.916		0111.917	0121.916	0121.917	0121.918	0131.916	0131.917	0131.918

Only possible with cylinder rod end "M" (external thread)


#### Electrical connection

Analogue output 4...20 mA (two-wire technology)

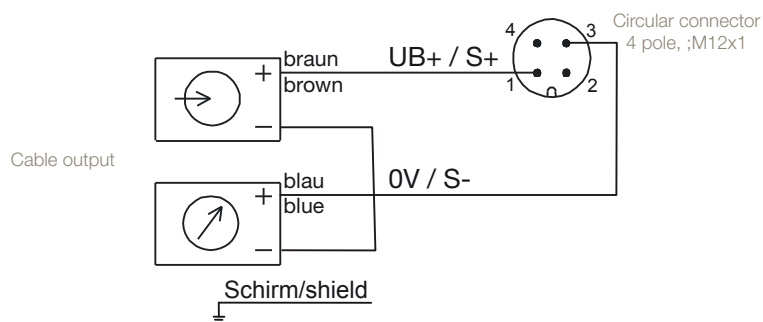


Order no.	Cable for force sensor
on request	Force sensor cable (PUR), straight connector, M12 with flying leads, 2 m
on request	Force sensor cable (PUR), straight connector, M12 with flying leads, 5 m
on request	Force sensor cable (PUR), angle connector, M12 with flying leads, 2 m
on request	Force sensor cable (PUR), angle connector, M12 with flying leads, 5 m

**Version for ETH032**

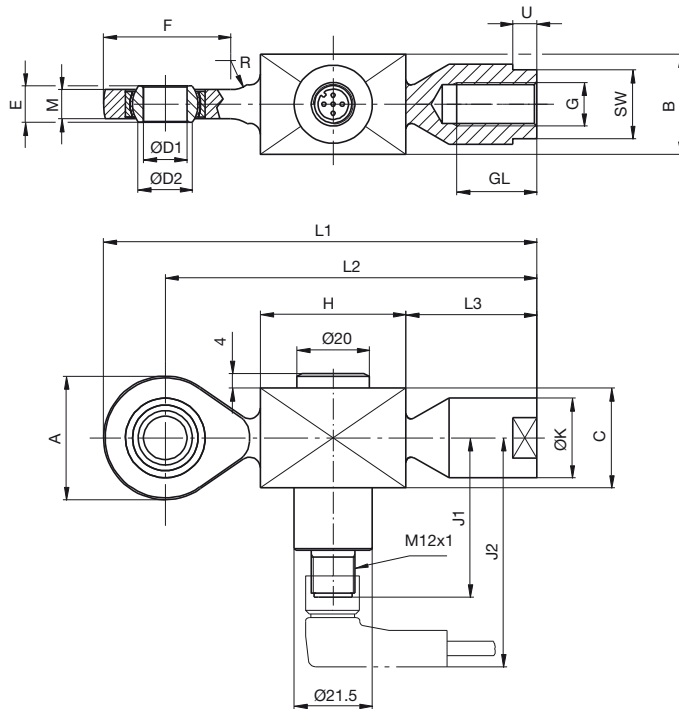

**Version for ETH050 & ETH080**

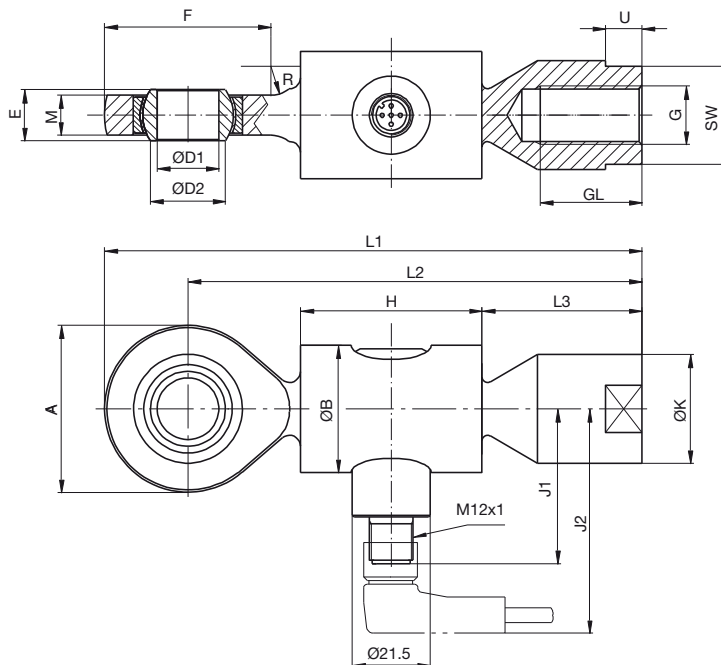

Dimensions [mm]

**Dimensions**


	A	B	ØB	C	ØD1	ØD2 0.008	E	F	G	GL	H	J1	J2	ØK	L1	L2	L3	M	SW*	U
for ETH032	34	27	-	27	12	15	10	35	M10x1.25	22	40	44	63	22	119	102	36	8	19	8
for ETH050	46	-	35	-	17	20.7	14	46	M16x1.5	28	50	43	62	30	148	125	44	11	27	12
for ETH080	53	-	54	-	20	24.2	16	54	M20x1.5	33	54	44	63	35	171	144.5	54	13	32	13

\*SW: Width across flat

## Force sensors

### Rear clevis with force sensor

In some force measurement applications, a force sensor on the cylinder rod is not possible or will affect the application's scope. For this case, we developed a special variant of the ETH cylinder, where the force sensor is integrated into the rear end of the cylinder. The advantage is that the sensor cable does not move with the rod. All force sensors are configured as traction/thrust sensors. Analog standard output signals 4...20 mA are available. The sensors correspond to the EN 61326 standard for electromagnetic compatibility (EMC).

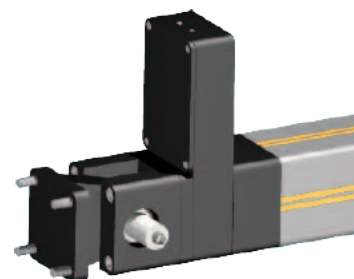

#### Features

- Measuring range:  
Traction/thrust forces up to  $\pm 25$  kN
- Thin film implants (instead of conventional bonded foil strain gauges)
- Corrosion resistant stainless steel version
- Integrated amplifier
- Small temperature drift
- High long term stability
- High shock and vibration resistance
- For dynamic or static measurements
- Good repeatability
- Simple mounting

**Connection of the force sensors to Compax3 is possible on request.**


#### Technical Data

Rear clevis with force sensor for ETH...										
	Unit	ETH032			ETH050			ETH080		
		M05	M10	M16	M05	M10	M20	M05	M10	M32
Accuracy	[%]	1								
Material	-	Stainless steel								
Protection class	-	IP67								
Measuring range	[kN]	$\pm 3.7$	$\pm 3.7$	$\pm 2.4$	$\pm 9.3$	$\pm 7.0$	$\pm 4.4$	$\pm 17.8$	$\pm 25.1$	$\pm 10.6$
Accuracy	[N]	74.0	74.0	48.0	186.0	140.0	88.0	356.0	502.0	212.0
Part No.	-	0112.034-01	0112.034-02	0122.034-01	0122.034-02	0122.034-03	0132.034-01	0132.034-02	0132.034-03	

Only for parallel configuration and cylinders with "F" mounting option (mounting thread on the cylinder body)


#### Electrical connection

Analog output 4...20 mA (two-wire technology)

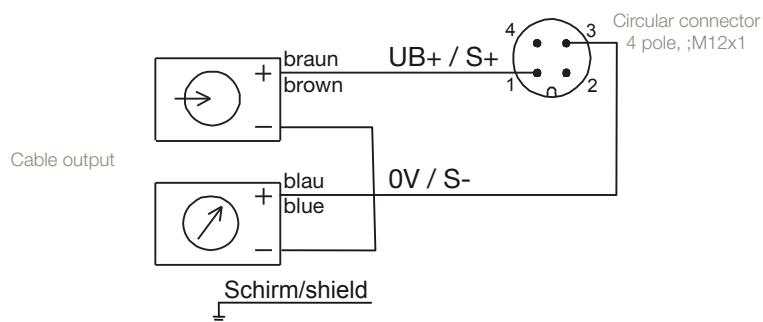

Order no.	Cable for force sensor
on request	Force sensor cable (PUR), straight connector, M12 with flying leads, 2 m
on request	Force sensor cable (PUR), straight connector, M12 with flying leads, 5 m
on request	Force sensor cable (PUR), angle connector, M12 with flying leads, 2 m
on request	Force sensor cable (PUR), angle connector, M12 with flying leads, 5 m

Version with fixing flange for ETH cylinder

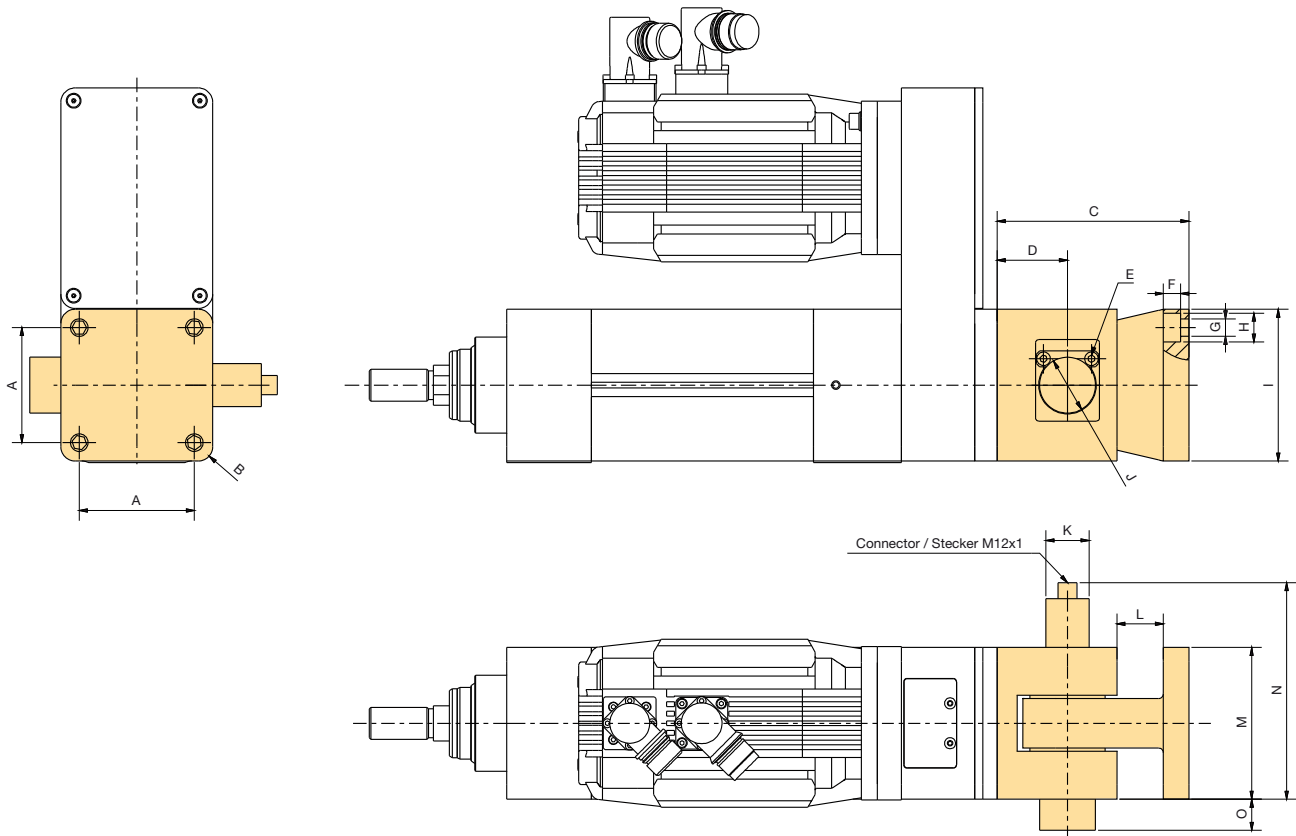

Dimensions [mm]

Dimensions


	A	B	C	D	E*	F	G	H	I	ØJ	ØK	L	M	N	O
for ETH032	32.5	R7	72	27	SW3	6.4	6.6	11	46.5	20	27	12	46.5	98.25	6.75
for ETH050	46.5	R8.5	89	32	SW3	8.8	9	15	63.5	25	27	17	63.5	111.75	3.25
for ETH080	72	R9	123	47	SW4	10.8	11	18	95	35	27	29	95	135.5	0

\*SW: Width across flat

## Initiators / Limit Switches

### Sensors


The position sensors can be mounted in the longitudinal grooves of the cylinder body and are directly immersible in the profile; projecting edges are thus avoided. The initiator cable is hidden under the yellow cover. The permanent magnet integrated into the screw nut actuates the sensors. Fitting sensors available as accessories.

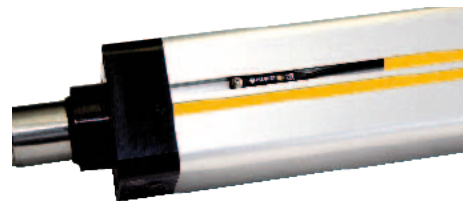


ETH032, ETH050 2 grooves each on 2 opposite sides.  
ETH080 2 grooves each on all sides.

The following initiator types are available for the ETH cylinder series:


PNP Sensor (P8S-...)

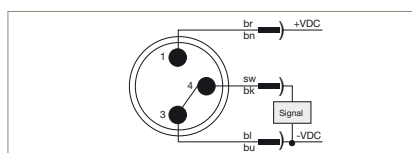

NPN Sensor (P8S-...)

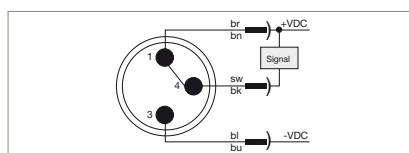

Info: Do only use PNP types for ETH with Compax3.

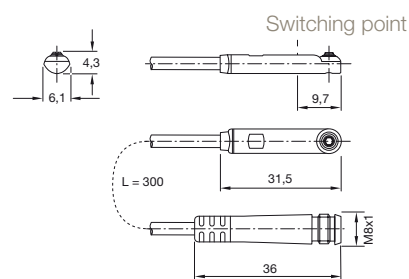


Dimensions [mm]

### Magnetic cylinder sensors


Type	Function	LED	Logic	Cable	Electric current drain	Switching current	Supply voltage	Switching Frequency	compatible with Compax3				
P8S-GPFLX	N.O.	yes	PNP	3 m	max. 100 mA	max. 10 mA	10-30 VDC	5 kHz	yes				
P8S-GNFLX			NPN						No				
P8S-GPSHX			PNP	0.3 m cable with M8 connector					yes				
P8S-GNSHX			NPN						No				
P8S-GQFLX	N.C.		PNP	3 m					max. 100 mA	max. 10 mA	10-30 VDC	5 kHz	yes
P8S-GMFLX			NPN										No
P8S-GQSHX			PNP	0.3 m cable with M8 connector									yes
P8S-GMSHX			NPN										No

### ETH with Compax3


(do only use PNP types)

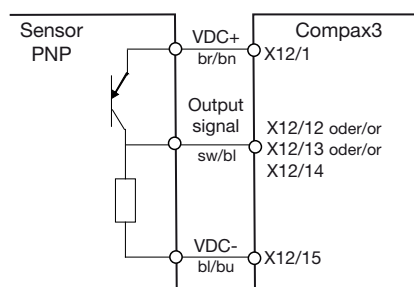

Variant 1: X12 Input - direct

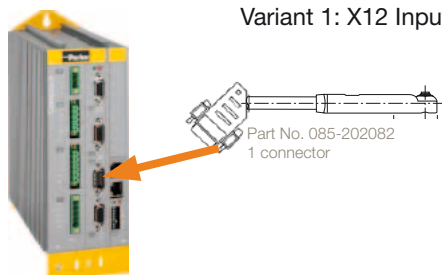

Variant 2: X12 Input - via digital I/Os

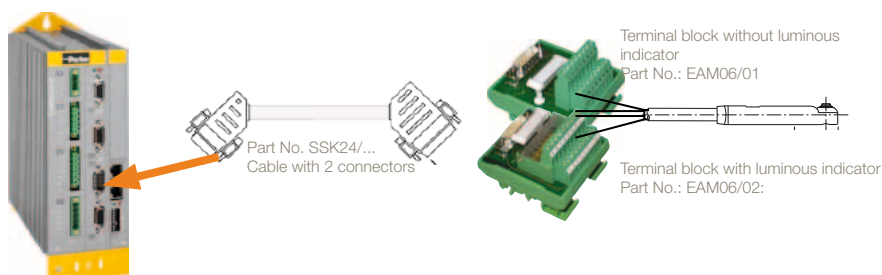



# Drive Train Selection

## Example for Dimensioning with Predefined Drive Trains

In order to simplify the dimensioning process for a complete drive train, we prepared an overview of predefined electro cylinders, gearboxes, motors and servo drives, which can be found on the following pages. With a few parameters, you can directly find the order code for the required components.  
Please respect the boundary conditions!

**The following application parameters are required:**

- The equivalent axial force.  
(Calculation page 10 formula 3 with the forces determined as described on page 8).
- The maximum speed.

### Working with the drive train table

- Select the drive trains providing the required axial force (e.g. by drawing a vertical line).
- Then select from this choice the drive trains, that are able to travel at the required speed (e.g. by drawing a second vertical line).
- The suitable drive train can then be selected from the remaining range, if necessary by comparing additional characteristics.

Please check if all given characteristics (such as max. acceleration, supply voltage etc.) are suitable for your application.

### Example:

Required data

Equivalent axial force: 5000 N  
Speed: 300 mm/s



## Predefined Motion Packages for ETH032


In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

### Boundary conditions:

- Stroke from 50 to 400 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded, e.g.
  - for parallel drive: transmissible torque depending on the motor speed  $n$  must be respected
  - permissible axial thrust forces must be respected
  - Ambient conditions
  - ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox 20 °C ambient temperature
- up to 1000 m above sea level

### Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

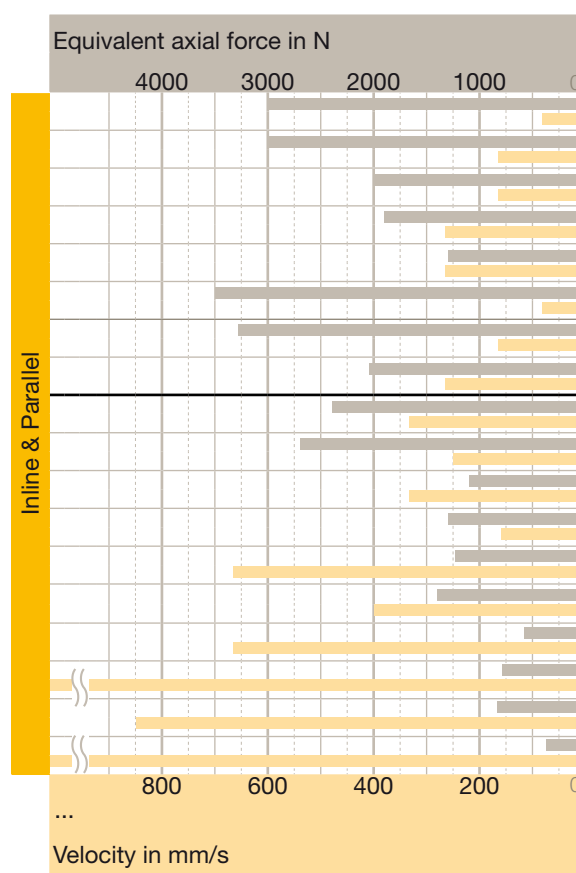

	Screw lead	Supply voltage	Order Codes						Motor cable	Feedback cable
	mm	V	Cylinder	Gearbox	Motor	Drive				
	5	230	ETH032M05A1P1AFMN0200A	PS60-003-S2/MU60-001	SMH60601,4511 2ID65G44	C3S025V2F 11lxxTxxMxx	(cable chain compatible)			
	10	230	ETH032M10A1P1AFMN0200A	PS60-003-S2/MU60-321	SMH826003814 2ID65G54	C3S025V2F 11lxxTxxMxx				
	10	230								
	16	230	ETH032M16A1P1AFMN0200A							
	16	230								
	5	400	ETH032M05A1P1AFMN0200A	PS60-003-S2/MU60-001	SMH60601,4511 2ID65G44	C3S015V4F 11lxxTxxMxx	(cable chain compatible)			
	10	400	ETH032M10A1P1AFMN0200A	PS60-003-S2/MU60-321	SMH826003814 2ID65G54	C3S038V4F 11lxxTxxMxx				
	16	400	ETH032M16A1P1AFMN0200A							
	5	230	ETH032M05A1K1CFMN0200A	without gearbox	SMH824503814 2ID65G52	C3S063V2F 11lxxTxxMxx	(standard) or MOK54/... (cable chain compatible)			
	5	230			SMH826003814 2ID65G54					
	5	230	ETH032M05A1K1BFMN0200A		SMH60451,4511 2ID65G42	C3S025V2F 11lxxTxxMxx				
	5	230			SMH60601,4511 2ID65G44					
	10	230	ETH032M10A1K1CFMN0200A		SMH824503814 2ID65G52	C3S063V2F 11lxxTxxMxx				
	10	230			SMH826003814 2ID65G54					
	10	230	ETH032M10A1K1BFMN0200A		SMH60451,4511 2ID65G42	C3S025V2F 11lxxTxxMxx				
	16	230	ETH032M16A1K1CFMN0200A		SMH824503814 2ID65G52	C3S063V2F 11lxxTxxMxx				
	16	230			SMH826003814 2ID65G54					
	16	230	ETH032M16A1K1BFMN0200A		SMH60451,4511 2ID65G42	C3S025V2F 11lxxTxxMxx				

Order codes:

**bold:** mandatory so that the package is combinable.

*italics:* recommended/standard

**blue:** must be selected depending on the application.

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

## Predefined Motion Packages for ETH050


In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

### Boundary conditions:

- Stroke from 50 to 600 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded, e.g.
  - for parallel drive: transmissible torque depending on the motor speed  $n$  must be respected
  - permissible axial thrust forces must be respected
  - Ambient conditions
  - ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox 20 °C ambient temperature
- up to 1000 m above sea level

### Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

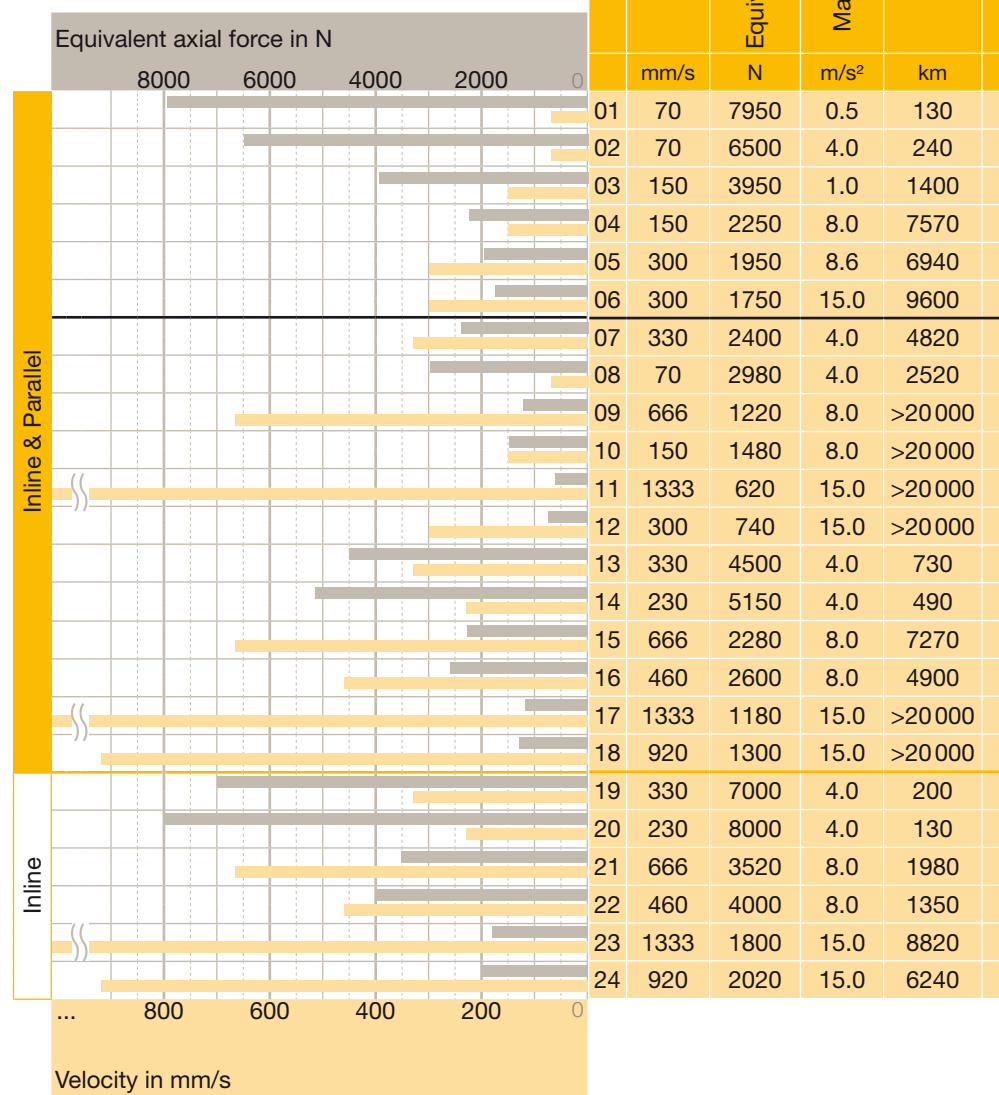

	Screw lead	Supply voltage	Order Codes						Motor cable	Feedback cable
	mm	V	Cylinder	Gearbox	Motor	Drive				
5	230	ETH050M05A1P1AFMN0300A	PS60-003-S2/MU60-321	SMH8256038142ID65G54	C3S063V2F 11lxxTxxMxx		(cable chain compatible)	MOK55/... (standard) or MOK54/... (cable chain compatible)	GBK 24/... (cable chain compatible)	
5	230				C3S025V2F 11lxxTxxMxx					
10	230				C3S063V2F 11lxxTxxMxx					
10	230				C3S025V2F 11lxxTxxMxx					
20	230				C3S063V2F 11lxxTxxMxx					
20	230				C3S025V2F 11lxxTxxMxx					
5	230	ETH050M05A1K1CFMN0300A	without gearbox	SMH8245038142ID65G52	C3S063V2F 11lxxTxxMxx		(cable chain compatible)	MOK55/... (standard) or MOK54/... (cable chain compatible)	GBK 24/... (cable chain compatible)	
5	230				SMH8210038142ID65G52 C3S025V2F 11lxxTxxMxx					
10	230				SMH8245038142ID65G52 C3S063V2F 11lxxTxxMxx					
10	230				SMH8210038142ID65G52 C3S025V2F 11lxxTxxMxx					
20	230				SMH8245038142ID65G52 C3S063V2F 11lxxTxxMxx					
20	230				SMH8210038142ID65G52 C3S025V2F 11lxxTxxMxx					
5	400	ETH050M05A1K1FFMN0300A	without gearbox	SMH10056068ET2ID65G54	C3S075V4F 11lxxTxxMxx		(cable chain compatible)	MOK55/... (standard) or MOK54/... (cable chain compatible)	GBK 24/... (cable chain compatible)	
5	400				SMH10030068ET2ID65G54 C3S038V4F 11lxxTxxMxx					
10	400				SMH10056068ET2ID65G54 C3S075V4F 11lxxTxxMxx					
10	400				SMH10030068ET2ID65G54 C3S038V4F 11lxxTxxMxx					
20	400				SMH10056068ET2ID65G54 C3S075V4F 11lxxTxxMxx					
20	400				SMH10030068ET2ID65G54 C3S038V4F 11lxxTxxMxx					
5	400	ETH050M05A1K1DFMN0300A	without gearbox	MH10560089192I65A74	C3S150V4F 11lxxTxxMxx		(cable chain compatible)	MOK55/... (standard) or MOK54/... (cable chain compatible)	GBK 24/... (cable chain compatible)	
5	400				MH10530089192I65A74 C3S075V4F 11lxxTxxMxx					
10	400				MH10560089192I65A74 C3S150V4F 11lxxTxxMxx					
10	400				MH10530089192I65A74 C3S075V4F 11lxxTxxMxx					
20	400				MH10560089192I65A74 C3S150V4F 11lxxTxxMxx					
20	400				MH10530089192I65A74 C3S075V4F 11lxxTxxMxx					

Order codes:

**bold:** mandatory so that the package is combinable.

*italics:* recommended/standard

**blue:** must be selected depending on the application.

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

## Predefined Motion Packages for ETH080


In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

### Boundary conditions:

- Stroke from 50 to 800 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded, e.g.
  - for parallel drive: transmissible torque depending on the motor speed  $n$  must be respected
  - permissible axial thrust forces must be respected
  - Ambient conditions
  - ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox 20 °C ambient temperature
- up to 1000 m above sea level

### Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

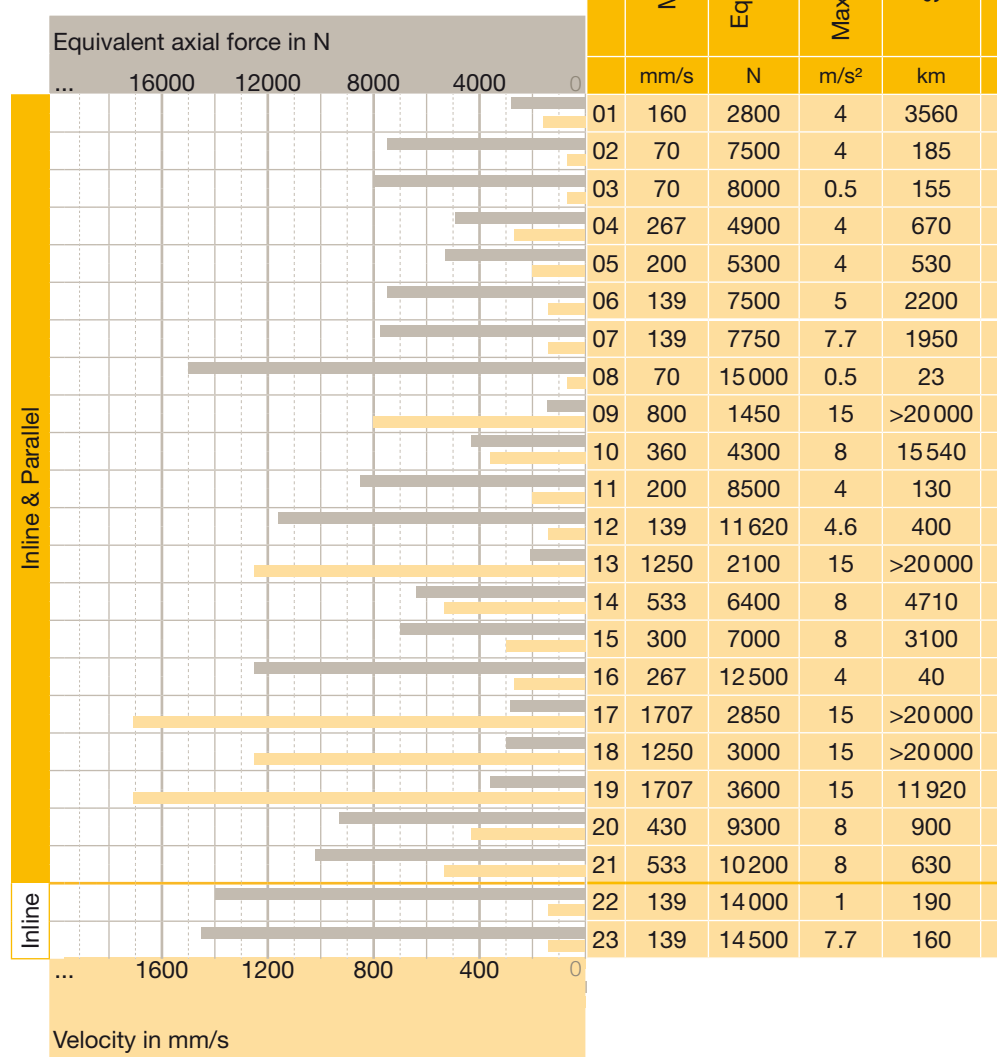

	Screw lead	Supply voltage	Order Codes						
			Cylinder	Gearbox	Motor	Drive	Motor cable	Feedback cable	
	mm	V							
5	400	ETH080M05A1K1EFMN0400A	without gearbox	SMH8230035192ID65G54	C3S038V4F 11lxxTxxMxx	GBK 24/... (cable chain compatible)	①		
5	400	ETH080M05A1P1BFMN0400A	PS90-003-S2/MU90-085	SMH8256038192ID65G54	C3S038V4F 11lxxTxxMxx				
5	400			SMH8230038192ID65G54	C3S038V4F 11lxxTxxMxx				
5	400	ETH080M05A1K1EFMN0400A	without gearbox	SMH10056065192ID65G54	C3S075V4F 11lxxTxxMxx				
5	400			SMH10030065192ID65G54	C3S038V4F 11lxxTxxMxx				
10	400	ETH080M10A1P1BFMN0400A	PS90-003-S2/MU90-088	SMH10030065192ID65G54	C3S038V4F 11lxxTxxMxx				
10	400			SMH10056065192ID65G54	C3S075V4F 11lxxTxxMxx				
5	400	ETH080M05A1P1BFMN0400A		SMH10030065192ID65G54	C3S038V4F 11lxxTxxMxx				
32	400	ETH080M32A1K1JFMN0400A			C3S075V4F 11lxxTxxMxx				
10	400	ETH080M10A1K1JFMN0400A	without gearbox	SMH11530107242ID65G54	C3S075V4F 11lxxTxxMxx				
5	400	ETH080M05A1K1JFMN0400A			C3S075V4F 11lxxTxxMxx				
10	400	ETH080M10A1P1BFMN0400A	PS90-003-S2/MU90-345	SMH11530108192ID65G54	C3S075V4F 11lxxTxxMxx				
32	400	ETH080M32A1K1KFMN0400A		SMH14230155242ID65G54	C3S150V4F 11lxxTxxMxx				②
10	400	ETH080M10A1K1KFMN0400A		SMH14256155242ID65G54	C3S150V4F 11lxxTxxMxx				
10	400	ETH080M10A1K1KFMN0400A		SMH14230155242ID65G54	C3S150V4F 11lxxTxxMxx				
5	400	ETH080M05A1K1KFMN0400A		SMH14256155242ID65G54	C3S150V4F 11lxxTxxMxx				
32	400	ETH080M32A1K1KFMN0400A	without gearbox	MH14545225243I65A74	C3S300V4F 11lxxTxxMxx				③
32	400	ETH080M32A1K1KFMN0400A		MH14530225243I65A74	C3S150V4F 11lxxTxxMxx				
32	400	ETH080M32A1K1KFMN0400A		MH14545285243I65A74	C3S300V4F 11lxxTxxMxx				
10	400	ETH080M10A1K1KFMN0400A		MH14530155242ID65G54	C3S150V4F 11lxxTxxMxx				
10	400	ETH080M10A1K1KFMN0400A		MH14545285243I65A74	C3S300V4F 11lxxTxxMxx	④			
10	400	ETH080M10A1P1BFMN0400A	PS90-003-S2/MU90-345	SMH11530108192ID65G54	C3S075V4F 11lxxTxxMxx				
10	400			SMH11556108192ID65G54	C3S150V4F 11lxxTxxMxx				

- ① MOK55/... (Standard) or MOK54/... (cable chain compatible)
- ② MOK56/... (Standard) or MOK57/... (cable chain compatible)
- ③ MOK59/... (Standard) or MOK64/... (cable chain compatible)

Order codes:

**bold:** mandatory so that the package is combinable.











*italics:* recommended/standard

**blue:** must be selected depending on the application.

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.



# Order code

ETH Series		Ordering example: ETH050M05A1K1AFMN0200A		ETH	050	M05	A	1	K1A
Frame size									
ISO 32					032				
ISO 50					050				
ISO 80					080				
Screw lead Mxx in mm									
ETH032	ETH050	ETH080				M05			
✓	✓	✓				M10			
✓	✓	✓				M16			
✓						M20			
	✓					M32			
Motor mounting position & profile orientation & groove orientation <sup>1)</sup>									
				Inline + groove for initiator 3 & 9 o'clock (standard)			A		
				Inline + groove for initiator 6 & 12 o'clock			B		
				Parallel 12 o'clock / groove for initiator 3 & 9 o'clock			C		
				Parallel 12 o'clock / groove for initiator 6 & 12 o'clock			D		
				Parallel 3 o'clock / groove for initiator 3 & 9 o'clock			E		
				Parallel 3 o'clock / groove for initiator 6 & 12 o'clock			F		
				Parallel 6 o'clock / groove for initiator 3 & 9 o'clock			G		
				Parallel 6 o'clock / groove for initiator 6 & 12 o'clock			H		
				Parallel 9 o'clock / groove for initiator 3 & 9 o'clock			J		
				Parallel 9 o'clock / groove for initiator 6 & 12 o'clock			K		
1) ETH080 features 2 grooves each on all 4 sides (i.e. Code B=A or D=C), therefore Codes A, C, E, G, J are possible for ETH080.									
Relubrication option <sup>2) &amp; 3)</sup>				Combination with motor mounting position, housing orientation, groove orientation					
				ETH032	ETH050	ETH080			
No additional relubrication hole (standard) (not with 3 o'clock motor mounting)				A, B, C, D, G, H, J, K	A, B, C, D, G, H, J, K	A, C, E, G, J		1	
Relubricating hole centered in the profile 12 o'clock				A, C, E, G, J	B, D, F, H, K	A, C, E, G, J		2	
Relubricating hole centered in the profile 3 o'clock				B, D, F, H, K	A, C, E, G, J	A, C, E, G, J		3	
Relubricating hole centered in the profile 6 o'clock				A, C, E, G, J	B, D, F, H, K	A, C, E, G, J		4	
Relubricating hole centered in the profile 9 o'clock				B, D, F, H, K	A, C, E, G, J	A, C, E, G, J		5	
2) With parallel configuration, the motor may block access to the sensors and the lubrication port. This depends on the motor mounting position.									
3) When selecting the relubrication options 2-5, the standard lubrication port is without function.									
Motor flange <sup>4)</sup>					Pilot	Bolt circle	Shaft	Shaft length	
With motor flange for Parker motor				SMH60-B08/9 or MH56-B05/9	40	63	9	20	K1A
				SMH60-B05/11 or MH70-B05/11 or NX3	60	75	11	23	K1B
				SMH82-B08/14	80	100	14	30	K1C
				SMH82-B08/19 or MH105-B9/19 (formerly HJ96 Motor) or NX4	80	100	19	40	K1D
				SMH82-B05/19 or SMH100-B5/19 or MH105-B5/19 or SMH100-B5/19 or MH105-B5/19	95	115	19	40	K1E
				SMH100-B5/14 <sup>①</sup>	95	115	14	30	K1F
				SMH115-B7/24 or MH105-B6/24 or NX6	110	130	24	50	K1J
				SMH142-B5/24 or MH145-B5/24	130	165	24	50	K1K
With gearbox flange for Parker gearbox				PS60	50	70	16	40	P1A
				PS90	80	100	22	52	P1B
				PE3	40	52	14	35	P1G
				PE4	80	100	20	40	P1H
Special flange one-piece (customized)				if you need a flange for a third-party motor, please					1xx
Special flange two-piece (customized)				contact us					2xx
4) Please check cylinder motor/gearbox combination with the aid of the table "Motor Mounting Options" see page 17).									



F	M	N	0200	A	
					Here, a number for customized cylinders is assigned, please contact us
				Uxx	Unique Version
					<b>Optional: only customized cylinder</b>
					<b>Protection class</b>
				A	IP54 with galvanized screws
				B	IP 54 stainless version with VA screws
				C	IP 65 like B + protective lacquer and specially sealed
					<b>Stroke in mm</b>
					ETH032 ETH050 ETH080
			0050	✓	✓
			0100	✓	✓
			0150	✓	✓
			0200	✓	✓
			0300	✓	✓
			0400		✓
			0600		✓
			1000	✓	
			1200		✓
			1600		✓
			XXXX	50...1000	50...1200 50...1600
					customized in steps of 1 mm
		N			<b>Option</b>
					Standard
					<b>Place holder</b>
					<b>Thrust rod</b>
	M				External thread <b>(standard)</b>
	F				Internal Thread
	C				Rod Clevis
	S				Spherical Rod Eye
	R				Outrigger Bearing (not in IP65 rating) (not with motor mounting positions E, F, J, K)
	L				Alignment Coupler
	X				customized - please contact us
					<b>Mounting type</b>
	F				Thread on the cylinder body <b>(standard)</b>
	B				Foot Mounting ② ③
	C				Rear Clevis ②
	D				Center trunnion (not with motor mounting positions E, F, J, K), for lubricating option "1", the lubrication port is always in 6 o'clock position
	E				Rear Eye Mounting ②
	G				Mounting Flanges③
	H				Rear Plate ②
	J				Front Plate ③
	N				Rear Plate & Front Plate ② ③
	X				customized - please contact us

① Order Code SMH100-B5/14: " SMH100.....ET..." (the motor shaft diameter is replaced by the term "ET")

(not in the motors catalog) only with feedback: Resolver, G5, A7

② Not with motor mounting options A & B.

③ Not for thrust rod R

## Software & Tools

- Actuator database
  - A special actuator database is available in the Compax3 ServoManager. You can simply enter the ETH type code for automatic controller parameterization.
- CAD configurator
  - Configure your electro cylinder CAD data online.  
[www.parker-eme.com/eth](http://www.parker-eme.com/eth)
- Dimensioning tool "EL-Sizing"
  - A dimensioning tool simplifies the dimensioning process.  
[www.parker-eme.com/eth](http://www.parker-eme.com/eth)







**WARNING – USER RESPONSIBILITY**

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

# Parker Worldwide

## Europe, Middle East, Africa

**AE – United Arab Emirates, Dubai**  
Tel: +971 4 8127100  
parker.me@parker.com

**AT – Austria, Wiener Neustadt**  
Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe, Wiener Neustadt**  
Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

**AZ – Azerbaijan, Baku**  
Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium, Nivelles**  
Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BY – Belarus, Minsk**  
Tel: +375 17 209 9399  
parker.belarus@parker.com

**CH – Switzerland, Etoy**  
Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

**CZ – Czech Republic, Klecany**  
Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany, Kaarst**  
Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark, Ballerup**  
Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain, Madrid**  
Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland, Vantaa**  
Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France, Contamine s/Arve**  
Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece, Athens**  
Tel: +30 210 933 6450  
parker.greece@parker.com

**HU – Hungary, Budapest**  
Tel: +36 1 220 4155  
parker.hungary@parker.com

**IE – Ireland, Dublin**  
Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IT – Italy, Corsico (MI)**  
Tel: +39 02 45 19 21  
parker.italy@parker.com

**KZ – Kazakhstan, Almaty**  
Tel: +7 7272 505 800  
parker.easteurope@parker.com

**NL – The Netherlands, Oldenzaal**  
Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway, Asker**  
Tel: +47 66 75 34 00  
parker.norway@parker.com

**PL – Poland, Warsaw**  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal, Leca da Palmeira**  
Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania, Bucharest**  
Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia, Moscow**  
Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden, Spånga**  
Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SK – Slovakia, Banská Bystrica**  
Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia, Novo Mesto**  
Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TR – Turkey, Istanbul**  
Tel: +90 216 4997081  
parker.turkey@parker.com

**UA – Ukraine, Kiev**  
Tel: +380 44 494 2731  
parker.ukraine@parker.com

**UK – United Kingdom, Warwick**  
Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**ZA – South Africa, Kempton Park**  
Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

## North America

**CA – Canada, Milton, Ontario**  
Tel: +1 905 693 3000

**US – USA, Cleveland**  
Tel: +1 216 896 3000

## Asia Pacific

**AU – Australia, Castle Hill**  
Tel: +61 (0)2-9634 7777

**CN – China, Shanghai**  
Tel: +86 21 2899 5000

**HK – Hong Kong**  
Tel: +852 2428 8008

**IN – India, Mumbai**  
Tel: +91 22 6513 7081-85

**JP – Japan, Tokyo**  
Tel: +81 (0)3 6408 3901

**KR – South Korea, Seoul**  
Tel: +82 2 559 0400

**MY – Malaysia, Shah Alam**  
Tel: +60 3 7849 0800

**NZ – New Zealand, Mt Wellington**  
Tel: +64 9 574 1744

**SG – Singapore**  
Tel: +65 6887 6300

**TH – Thailand, Bangkok**  
Tel: +662 717 8140

**TW – Taiwan, Taipei**  
Tel: +886 2 2298 8987

## South America

**AR – Argentina, Buenos Aires**  
Tel: +54 3327 44 4129

**BR – Brazil, Cachoeirinha RS**  
Tel: +55 51 3470 9144

**CL – Chile, Santiago**  
Tel: +56 2 623 1216

**MX – Mexico, Apodaca**  
Tel: +52 81 8156 6000

**VE – Venezuela, Caracas**  
Tel: +58 212 238 5422

We reserve the right to make technical changes. The data correspond to the technical state at the time of printing.  
© 2011 Parker Hannifin Corporation.  
All rights reserved.

192-550017N4

March 2011



**EMEA Product Information Centre**  
**Free phone: 00 800 27 27 5374**

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

**US Product Information Centre**  
**Toll-free number: 1-800-27 27 537**  
www.parker.com

Your local authorized Parker distributor